

TEMPLATE

McKinney T4A3786/T4A3386


4 1/2" Heavy Weight Full Mortise Template QC* Hinge (2 to 12 Wires)

McKinney


ASSA ABLOY

Experience a safer
and more open world

DO NOT SCALE
DIMENSIONS: INCHES (MM)

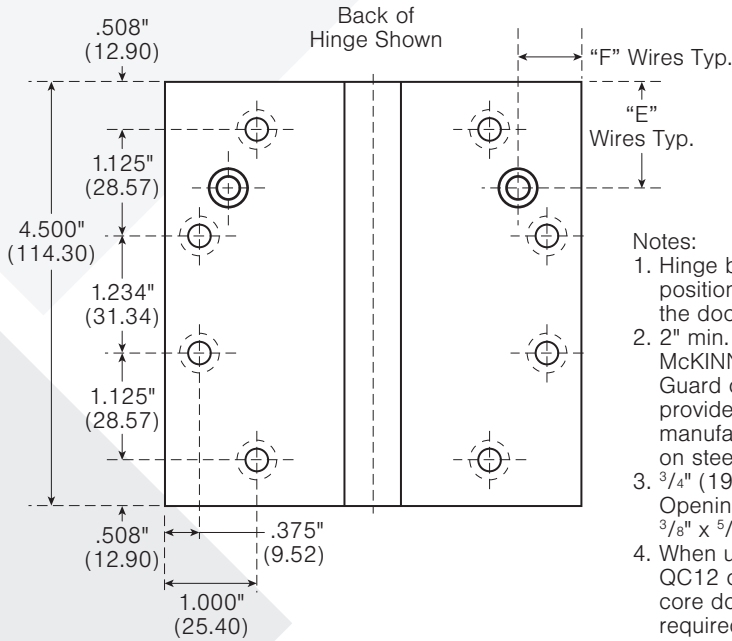

- Notes:
1. Hinge be applied at second position from the bottom on the door.
 2. 2" min. for wood frames. MCKINNEY MG-16 Mortar Guard or an equivalent provided by frame manufacturer required on steel frames.
 3. 3/4" (19.01) recommended. Opening in hinge reinforcing 3/8" x 3/8" min.
 4. When using the QC10 or QC12 on a wood or solid core door a pocket is required for wires and connectors consult factory for details.

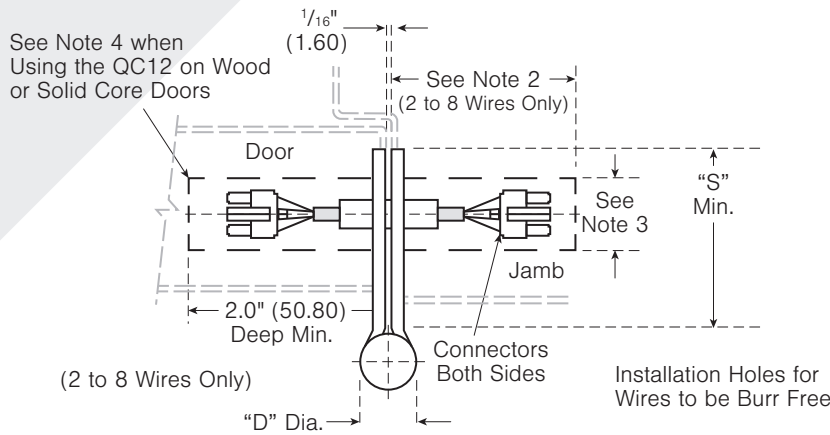

Bottom View (Hinge in Closed Position)

TEMPLATE 55440

EFFECTIVE DATE:
September 1, 2023

SUPERSEDES:
All Previous

McKinney Template Hinges of the Catalog Numbers are made to conform to ANSI/BHMA 156.7 for Screw Hole Location and Gauge of Metal. Wire location and hole size conforms to this drawing.

MACHINE SCREW SIZE:
1/2 x 12-24 F.H.

WOOD SCREW SIZE:
1 1/4 x 12 F.H.

*Connector system utilizes wire colors & locations compatible with Doors & Hardware from other ASSA ABLOY Group Companies.

**Check Catalog for Metals.

CATALOG NUMBER		GAUGE OF METAL	"D" OUTSIDE DIA.	"E" WIRE LOC.	"F" WIRE LOC.	"S" (SWAGE LINE) HINGE WIDTH	
STEEL HINGES	**NON-FERROUS HINGES					4" (101.6)	4 1/2" (114.3)
T4A3786xQC	T4A3386xQC	.180" (4.57)	.752" (19.10)	1.062" (26.96)	.750" (19.05)	1 9/16" (39.7)	1 13/16" (46.0)