
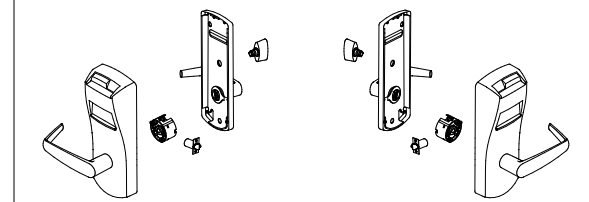


NOTES:  
 1- FOR DIMENSIONS AND TOLERANCES REFER TO CORRESPONDING DOOR PREPARATION DRAWING #IP-  
 2- ALL DIMS ARE IN INCHES [millimeters]  
 3- FOLDING LINES HIGH (H) AND LOW (L) FOR BEVEL EDGES SHOWN ARE FOR DOOR WITH 3° BEVEL ANGLE  
 4- SYMBOLS: - ∇ DEEP  
 - C CENTER LINE OF DOOR  
 - Ø DIAMETER

HOLE ID	DIM INCH	DIM mm	COMMENTS
A	Ø 1/2	Ø 12,7	-
B	Ø 2-1/8	Ø 54,0	-
C	Ø 1/8	Ø 3,2	∇ 7/8 [22,2]
D	Ø 3/32	Ø 2,4	∇ 5/8 [15,9]
E	Ø 1	Ø 25,4	∇ TO Ø B
F	Ø 1/2	Ø 12,7	ONLY IF THUMB TURN
G	∇ 7/16	∇ 11,1	ONLY IF LH OR RHR WITH 3/4 LATCH
H	∇ 7/16	∇ 11,1	ONLY IF RH OR LHR WITH 3/4 LATCH
J	Ø 3/4	Ø 19,1	ONLY MODELS WITH WIRES THROUGH THE DOOR

UNLESS OTHERWISE NOTED, DRILL HALF DOOR THICKNESS ON BOTH SIDES.

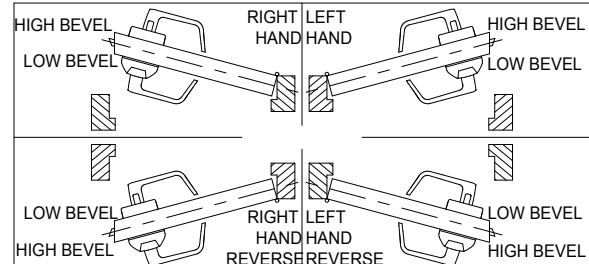

660, 660i, 760, 770, 790, 76, 79, E-PLEX 2000, POWER-PLEX 2000 & E-PLEX 7900 LOCK SERIES

DRILLING TEMPLATE  
 CYLINDRICAL UNIT 2-3/4" BACKSET



www.kabalodgingsupport.com

DO NOT REPRODUCE  
 CONTACT CUSTOMER SUPPORT  
 ILCO 1-877-468-3555  
 SAFLOK 1-800-999-6213  
 E-PLEX POWER-PLEX  
 1-800-849-8324

SHEET 1 OF 1	DATE 20SE17	UNE VERSION FRANCAISE DE CE DOCUMENT EST DISPONIBLE SUR DEMANDE.
	ECN 16312	DT-514989 REV-2

SEE NOTE #3

SEE NOTE #3