



# McKinney T4A3786/T4A3386

## 5" Heavy Weight Full Mortise Template QC\* Hinge (2 to 12 Wires)

DO NOT SCALE  
DIMENSIONS: INCHES (MM)

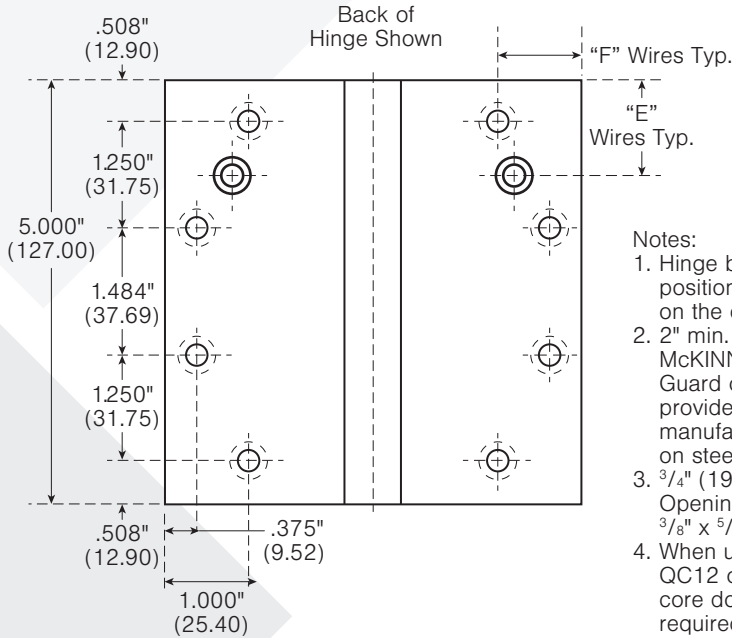

- Notes:
1. Hinge be applied at second position from the bottom on the door.
  2. 2" min. for wood frames. MCKINNEY MG-16 Mortar Guard or an equivalent provided by frame manufacturer required on steel frames.
  3. 3/4" (19.01) recommended. Opening in hinge reinforcing 3/8" x 5/8" min.
  4. When using the QC10 or QC12 on a wood or solid core door a pocket is required for wires and connectors consult factory for details.

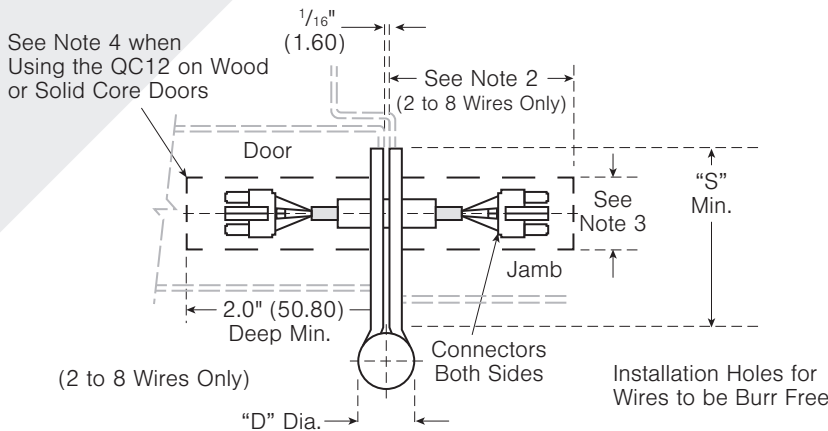

Bottom View (Hinge in Closed Position)

### TEMPLATE 55446

EFFECTIVE DATE:  
September 1, 2023

SUPERSEDES:  
All Previous

McKinney Template Hinges of the Catalog Numbers are made to conform to ANSI/BHMA 156.7 for Screw Hole Location and Gauge of Metal. Wire location and hole size conforms to this drawing.

MACHINE SCREW SIZE:  
1/2 x 12-24 F.H.

WOOD SCREW SIZE:  
1 1/4 x 12 F.H.

\*Connector system utilizes wire colors & locations compatible with Doors & Hardware from other ASSA ABLOY Group Companies.

\*\*Check Catalog for Metals.

| CATALOG NUMBER |                      | GAUGE OF METAL | "D" OUTSIDE DIA. | "E" WIRE LOC.  | "F" WIRE LOC. | "S" (SWAGE LINE) |                 |
|----------------|----------------------|----------------|------------------|----------------|---------------|------------------|-----------------|
| STEEL HINGES   | **NON-FERROUS HINGES |                |                  |                |               | HINGE WIDTH      |                 |
|                |                      |                |                  |                |               | 4 1/2" (114.30)  | 5" (127.00)     |
| T4A3786xQC     | T4A3386xQC           | .190" (4.83)   | .752" (19.10)    | 1.062" (26.96) | .750" (19.05) | 1 53/64" (46.40) | 2 5/64" (52.80) |