


IMPORTANT: USE ALTERNATE MOUNTING IF DOOR CAN OPEN BEYOND LIMITS SHOWN FOR STANDARD MOUNTING				
ARM TYPE	MOUNTING	MAX. DOOR OPENING	DIM. A	DIM. B
"H" HOLDER ARM	STANDARD	105°	7 1/2"	13 1/4"
	ALTERNATE	160° 	4 1/4"	10"


ARM TYPE	MOUNTING	MAX. DOOR OPENING	DIM. A	DIM. B
"H" HOLDER ARM	STANDARD	105°	7 1/2"	13 1/4"
	ALTERNATE	160° 	4 1/4"	10"

TOP DOOR RAIL MIN.	DIM. MAX. C
2 5/8	7/16
2 1/8 - 2 9/16	1/8
1 3/4 - 2 1/16	0


TOP DOOR RAIL MIN.	DIM. MAX. C
2 5/8	7/16
2 1/8 - 2 9/16	1/8
1 3/4 - 2 1/16	0

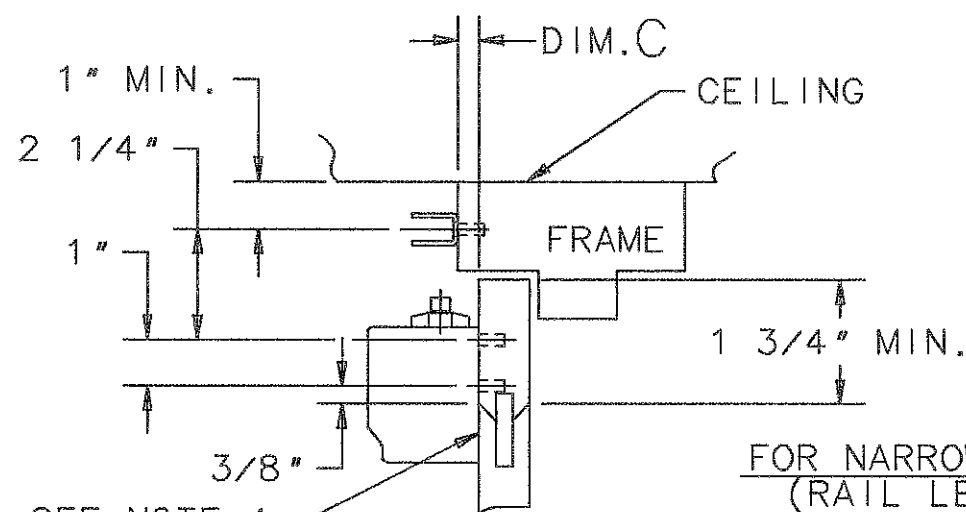

FOR NARROW RAIL DOOR ONLY
(RAIL LESS THAN 2 5/8)

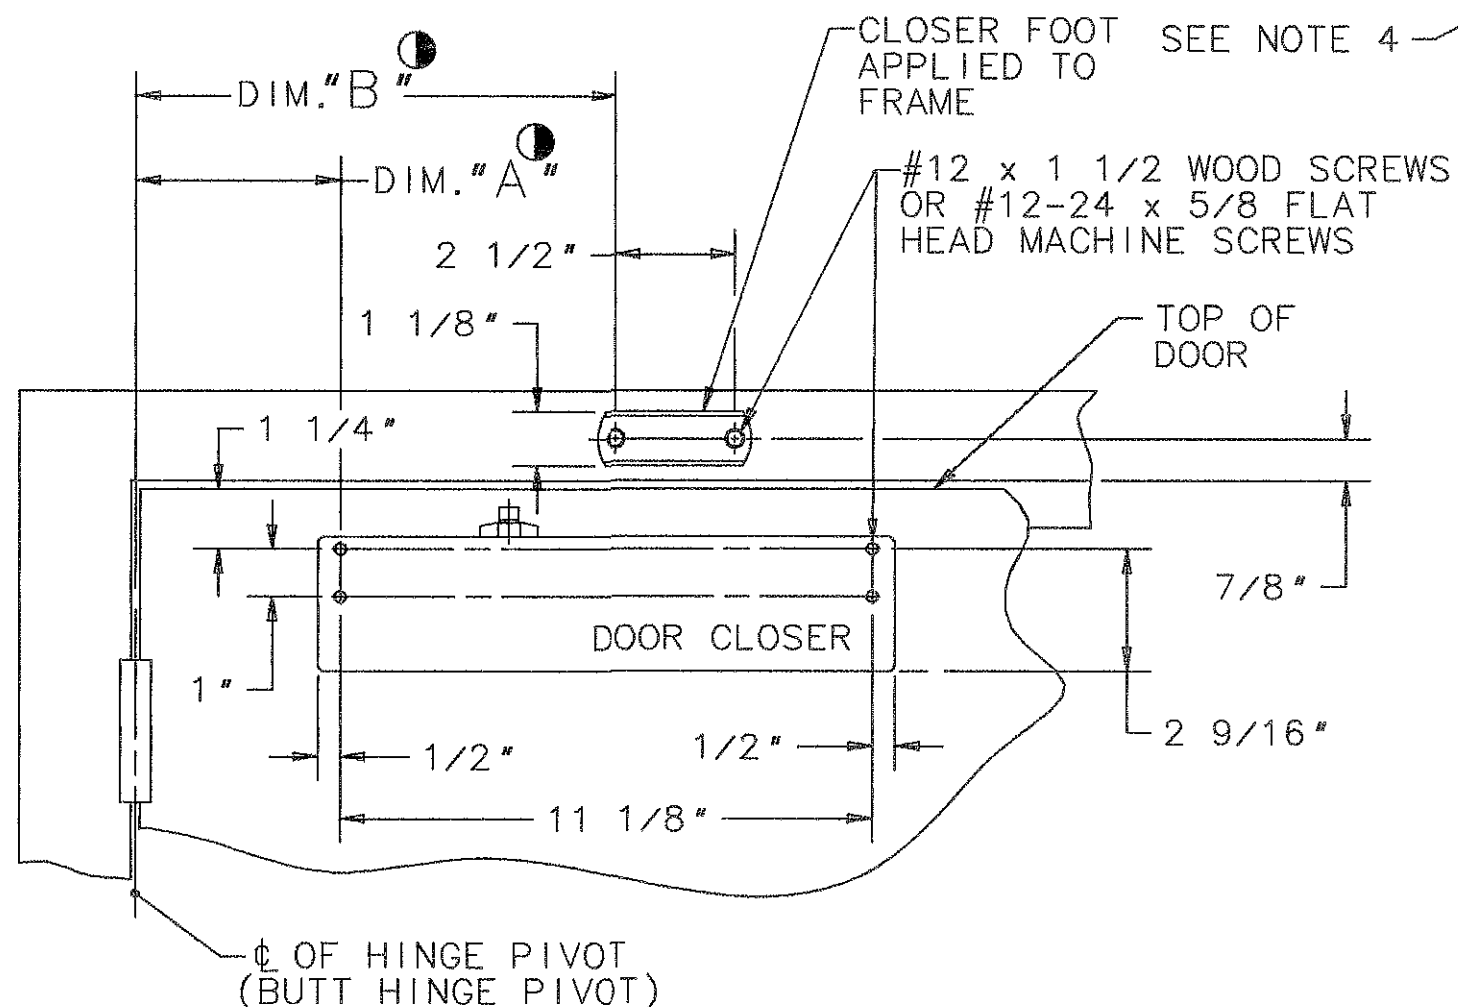

1 7/8" MIN. SPACE ———
REQUIRED FOR ARM
CLEARANCE WHEN TOP
RAIL OF DOOR IS 2 5/8
OR GREATER SEE ABOVE
FOR NARRROW RAIL DOOR

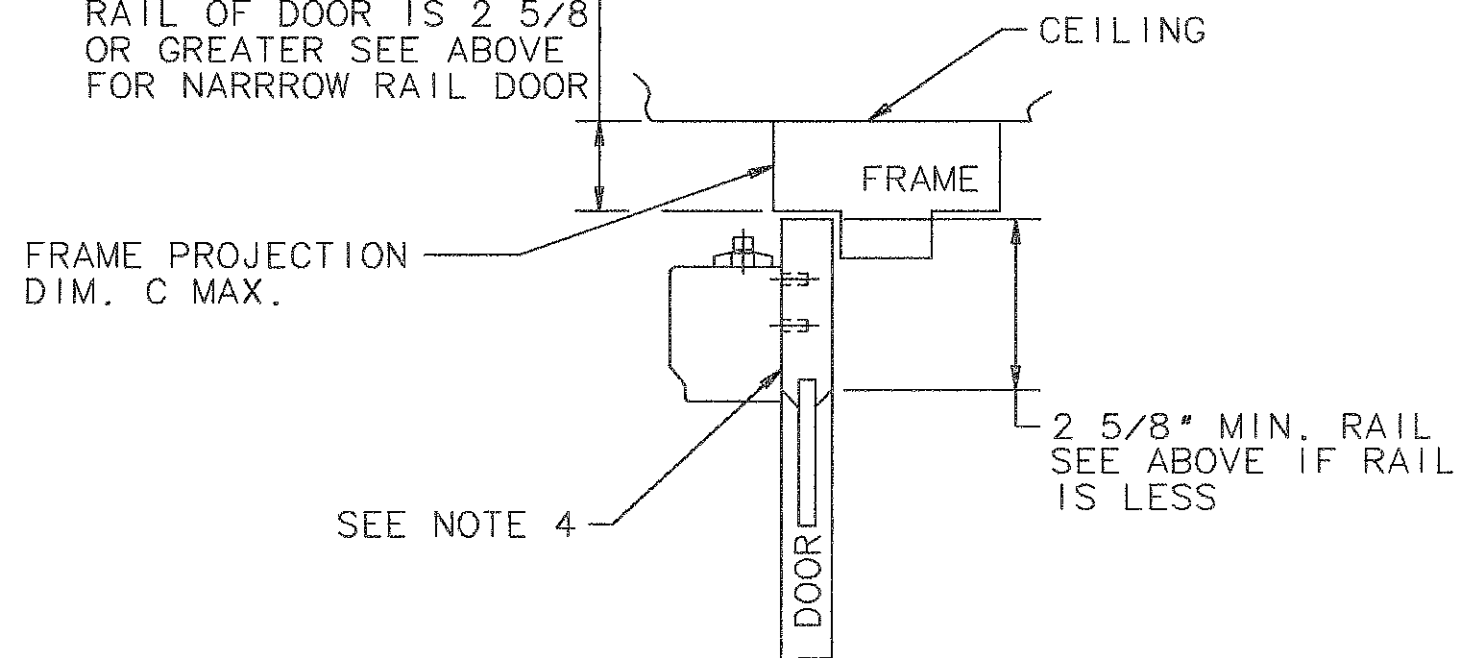

SEE NOTE 4

- ③ — IF BUTT, FRAME AND WALL CONDITIONS PERMIT,
CLOSER WILL ALLOW DOOR TO OPEN 180°.
- ② — RIGHT HAND DOOR SHOWN. LEFT HAND OPPOSITE.
- ① — 12 GAUGE MIN. REINFORCEMENT
REQUIRED FOR METAL DOORS & FRAMES.

- ⑤ — THIS DIMENSION IS TAKEN FROM HINGE
EDGE OF DOOR FOR INVISIBLE HINGES.
- ④ — 1430-J COVER PLATE MAY BE USED WHEN
CLOSER IS VIEWED THRU GLASS PANEL.

NEW HAVEN, CONN. 06511

DATA SHEET: 1430
SERIES CLOSER x STANDARD ARM
APPLICATION - "H" TYPE ARM

EFFECTIVE DATE	1 SEPT. 97
TEMPLATE NO.	A7127