






USE THIS DIMENSION WHEN DOOR
STOPS AGAINST FRAME AS ILLUSTRATED.
IF DOOR SILENCERS (RUBBER BUMPERS),
DOOR PANELS OR BOTH ARE USED INCREASE
THIS DIMENSION ACCORDINGLY.

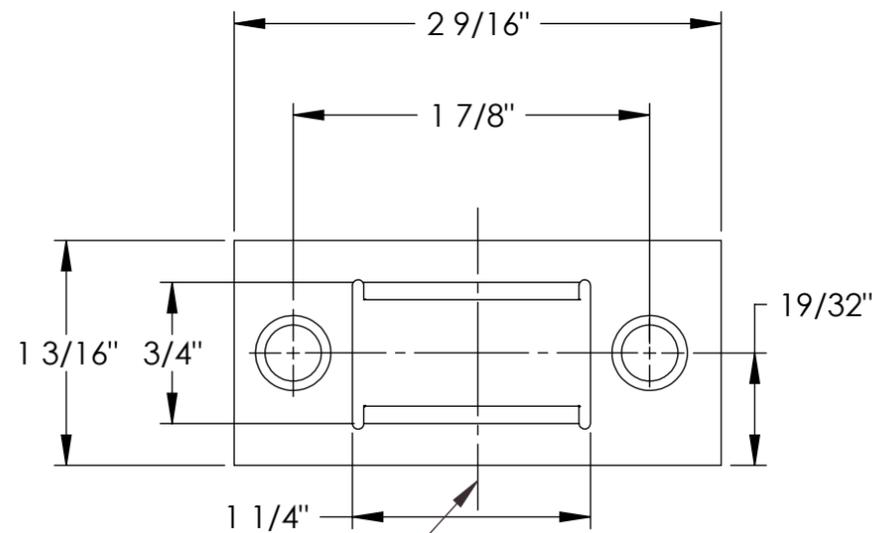

1. IF DEVICE BACKSET IS 1-5/8" OR MORE THAN STRIKE IS CENTERED ON BOLT.
2. IF DEVICE BACKSET IS LESS THAN 1-5/8" TO 1-1/8" THAN STRIKE IS CENTERED AT 1-3/8" BACKSET
3. IF DEVICE BACKSET IS LESS THAN 1-1/8" THIS STRIKE CAN NOT BE USED. CONSULT FACTORY FOR ALTERNATE STRIKE.

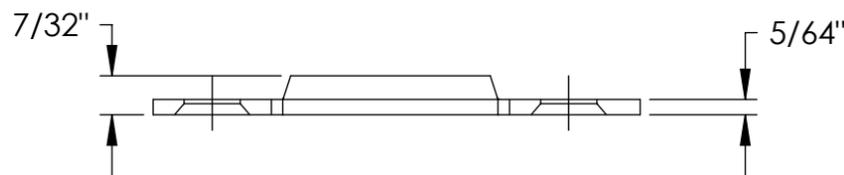

#650 TOP STRIKE
OR #652 TOP AND
BOTTOM STRIKES

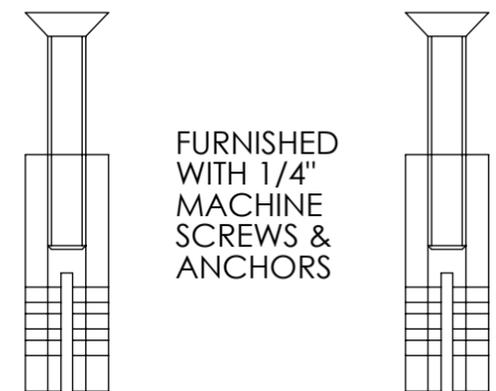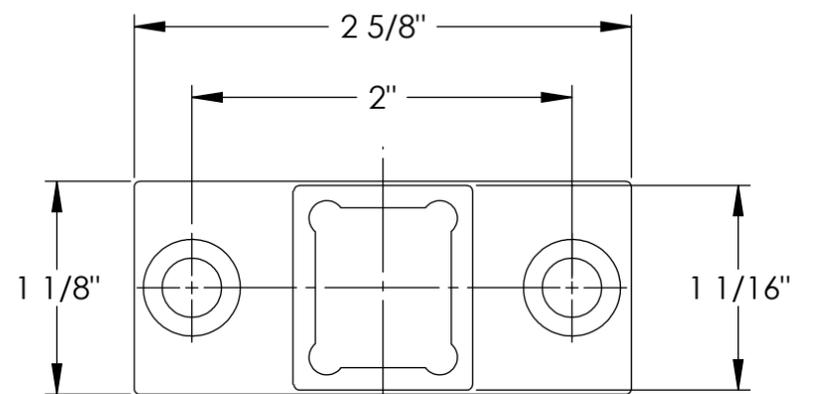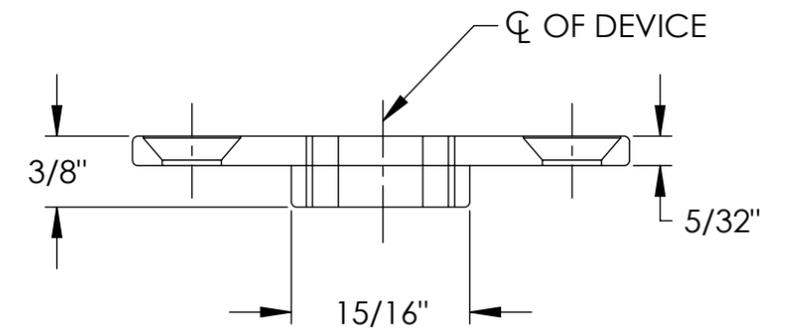

#606 BOTTOM STRIKE

NOTES:

1. OUTSIDE DIMENSIONS ARE MAX PART SIZE.
2. STANDARD BACKSET AND MAXIMUM BACKSET ARE 2-3/4"
3. MINIMUM BACKSET DEPENDS ON DEVICE AND APPLICATION, SEE DEVICE TEMPLATE FOR MINIMUM BACKSET

SARGENT Manufacturing Company
100 Sargent Drive New Haven, CT 06511

DOOR MANUFACTURER TEMPLATE:
STRIKES FOR CONCEALED VERTICAL
ROD EXIT DEVICES AND LOCKS

RELEASE DATE
JUNE 8, 2009

TEMPLATE NO.
4449 G