


9850HD

9850HD

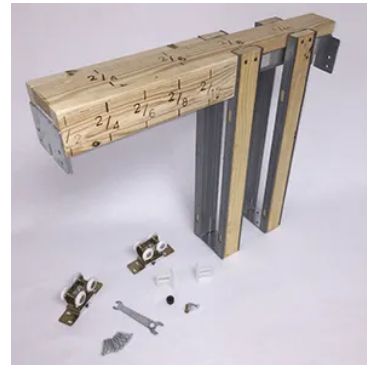

SPECIFICATIONS

Available Sizes	9850HD-96" 9850HD-102"
Case Quantity	1
Certifications	<ul style="list-style-type: none"> • Meets performance requirements of ANSI/BHMA 156.14 (Grade 1) for sliding doors by exceeding 100,000 cycles in operation. • Type: D02311-250 • ADA Compliant
Door Specifications	Up to 4'0" (1219 mm) wide and 8'0" (2438 mm) high
Door Thickness	For doors 1-3/8" - 1-3/4" (35 mm - 44 mm) thick
Installation	<ul style="list-style-type: none"> • For Bi-Parting Doors use Hager Double Pocket Door Kit 9639 (sold separately) • Joins 2 pocket door frames to make one large doorway. Rough opening width changes to 4 times one door width
Maximum Door Weight	250 lbs. (113 kg)
Notes	Compares to: Stanley PDF250, Lawrence PF619
Options	<ul style="list-style-type: none"> • See Related Files for additional information. • Available in 102" (2591 mm) at an extended lead time. Please contact Hager customer service for additional details.
Product Description	For 4'0" wide x 8'0" high doors, up to 250 lbs. (113 kg) per door.
Size	See size option chart under Related Files
Specifications	<ul style="list-style-type: none"> • Heavy-Duty, V-groove, jump-proof aluminum track • Pre-assembled header assembly goes up quickly • Easy door installation and removal for painting and repair • 3 pair of wood split studs with wood inserts - size 3/4" (19 mm) x 1-5/8" (26 mm) length relative to height • Steel encased for rigidity and to prevent fastener penetration into the pocket • Track header unit attaches to rough framing at both ends • Split studs can be nailed or screwed to track header