



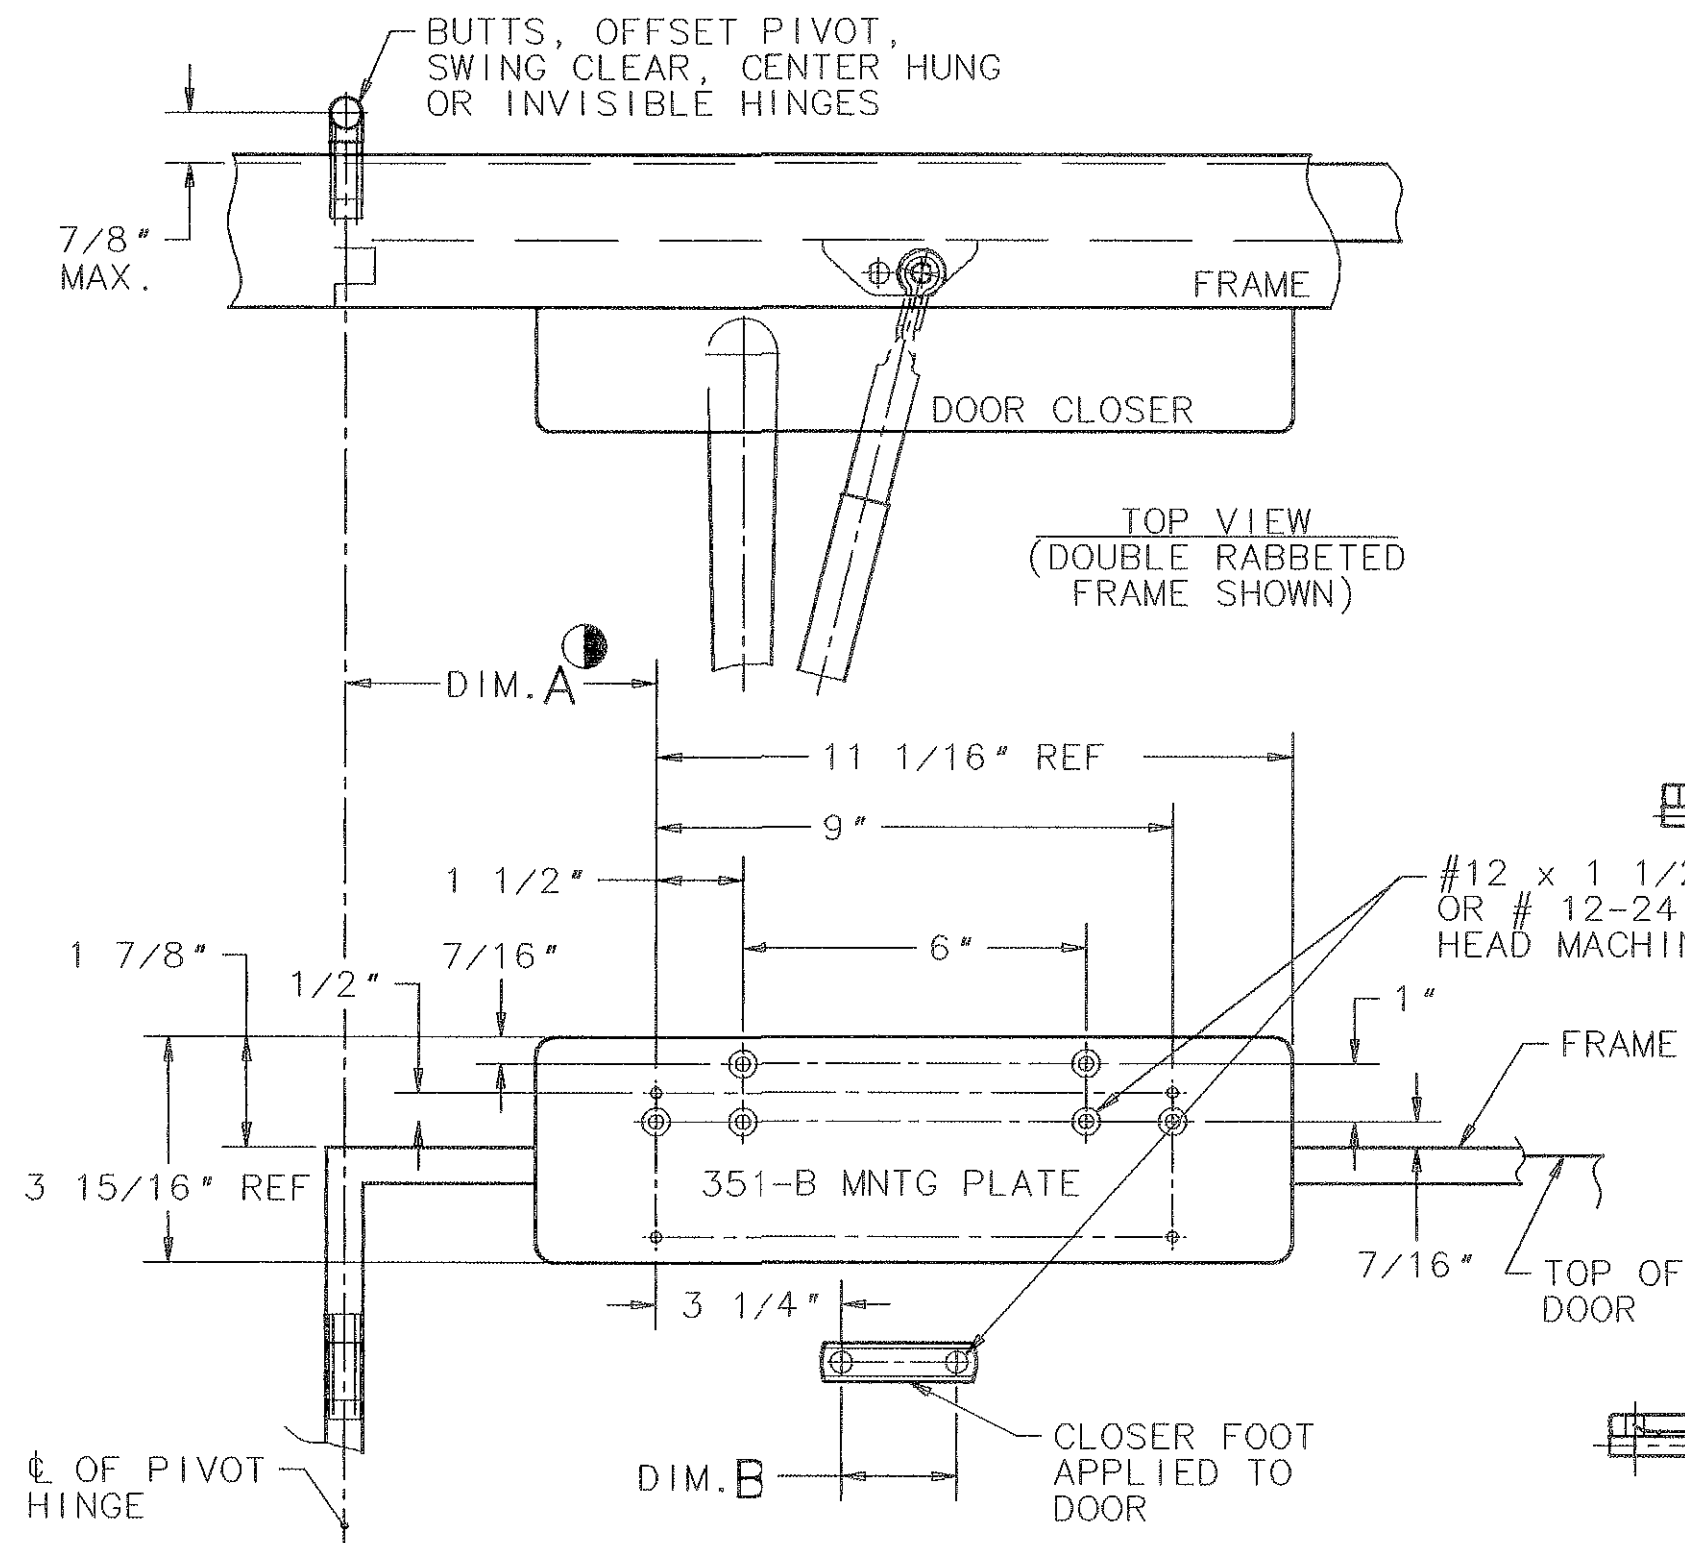

| DESCRIPTION                   | TYPE ARM | DOOR OPENING   |                | DIM. B | DEPTH OF REVEAL |
|-------------------------------|----------|----------------|----------------|--------|-----------------|
|                               |          | DIM. 110°<br>A | DIM. 140°<br>A |        |                 |
| REGULAR ARM WITHOUT HOLD OPEN | O        | 8 5/8"         | 5 3/8"         | 2"     | 0" TO 2"        |
|                               | OZ       |                |                |        | 2 1/8" TO 5"    |
|                               | OZA      |                |                |        | 5 1/8" TO 8"    |
| 90° HOLD OPEN FUSIBLE LINK    | F        | 8 3/8"         | 5 3/8"         | 2 1/2" | 0" TO 2"        |
|                               | FZ       |                |                |        | 2 1/8" TO 5"    |
|                               | FZA      |                |                |        | 5 1/8" TO 8"    |
| 90°-180° HOLDER ARM           | H        | 8 3/8"         | 5 3/8"         | 2 1/2" | 0" TO 2"        |
|                               | HZA      |                |                |        | 2 1/8" TO 5"    |
|                               |          |                |                |        | 5 1/8" TO 8"    |

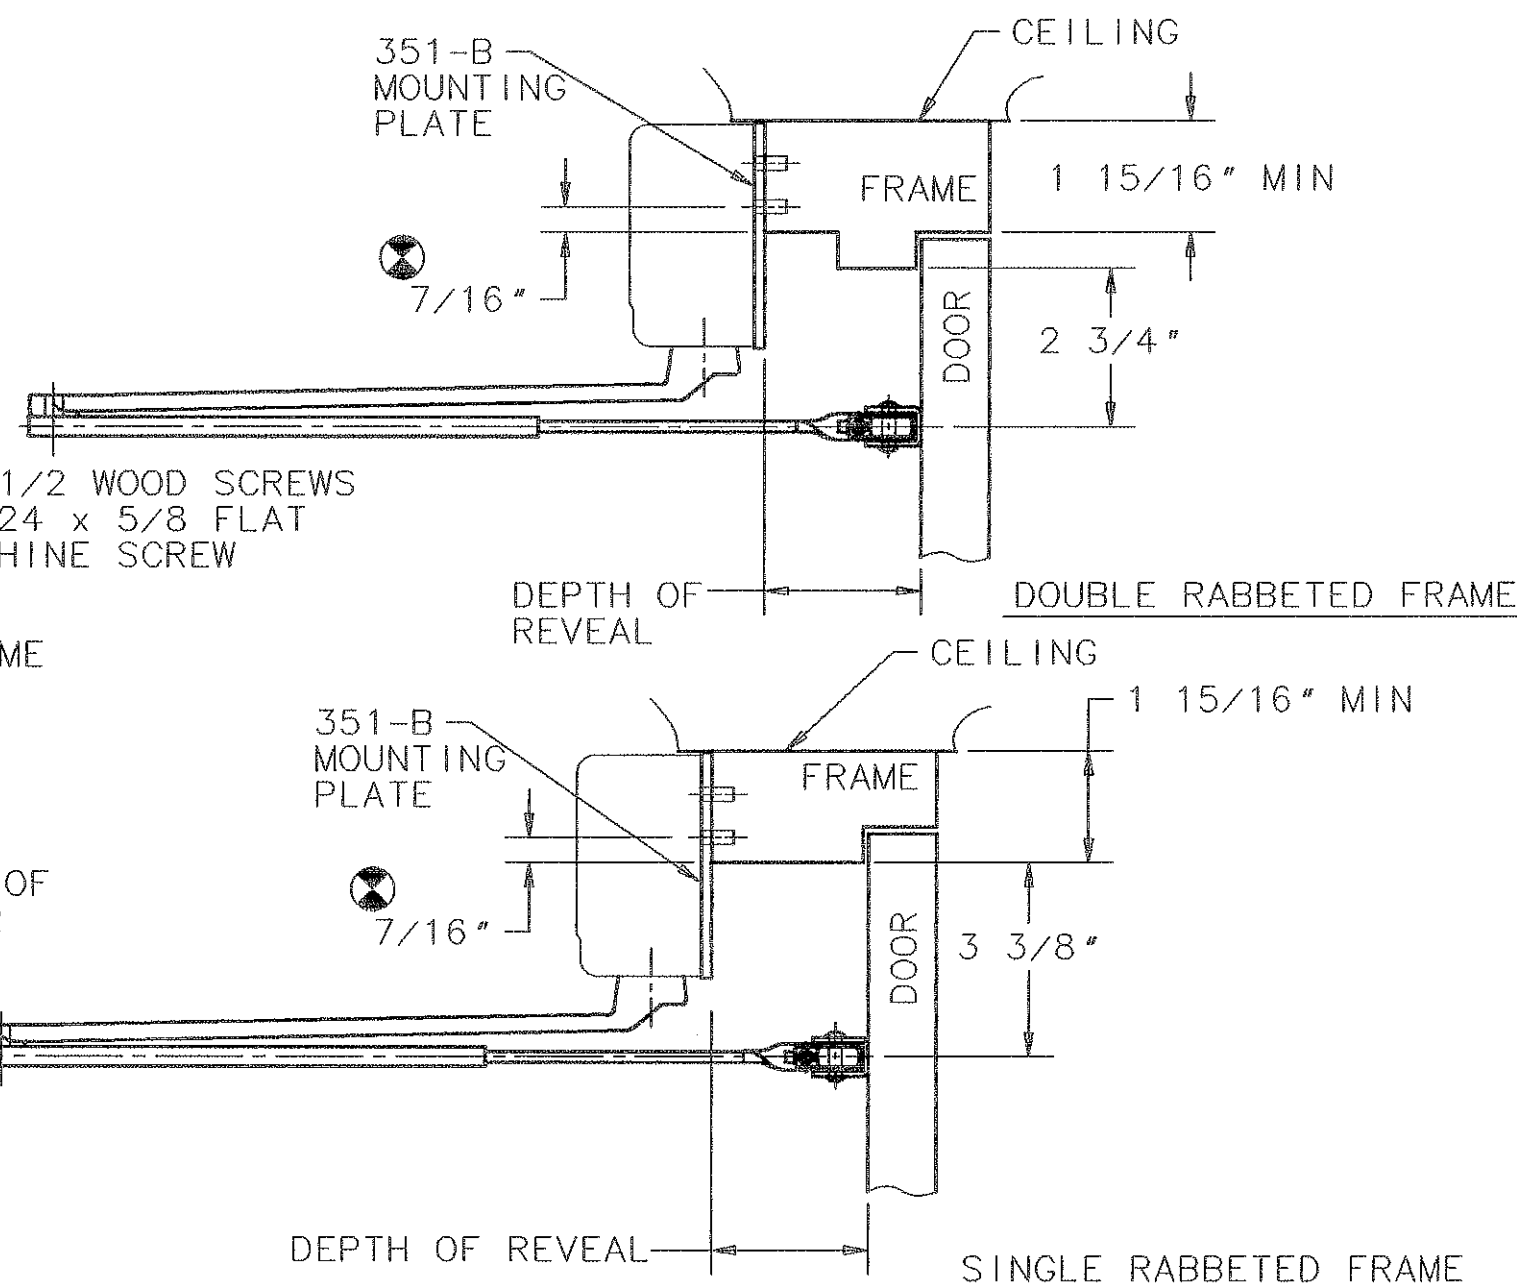

- ④ THIS DIMENSION IS TAKEN FROM HINGE EDGE OF DOOR FOR INVISIBLE HINGES.
- ③ LEFT HAND DOOR SHOWN, RIGHT HAND OPPOSITE.
- ② MAXIMUM DOOR OPENINGS SHOWN IN CHARTS APPLY TO DOORS UP TO 2 1/4" THICK ONLY.
- ① 12 GAUGE MIN. REINFORCEMENTS REQUIRED FOR METAL DOORS AND FAMES.

- ⑥ IF SPACE PERMITS, THIS DIMENSION MAY BE INCREASED. FOOT LOCATION SHOWN MAY THEN BE RAISED THE SAME DISTANCE ON THE DOOR TO ACCOMMODATE A NARROW DOOR RAIL.
- ⑤ DOOR OPENINGS TO 180° ARE POSSIBLE IF DEPTH OF REVEAL IS NOT GREATER THAN 2".

SARGENT MANUFACTURING COMPANY

NEW HAVEN, CONN. 06511

DATA SHEET: 351 SERIES CLOSER  
x TOP JAMB x LOW CEILING  
CONDITIONS O, H & F ARMS

EFFECTIVE DATE

SEPT 99

TEMPLET NO.

A6764 B