

9500 Series

Surface Mounted Electric Strike

Works with rim exit devices up to 3/4" throw latchbolt



The strong durable, fire-rated surface mounted solution.

The HES 9500 Series is a 3 hour fire-rated, surface mounted electric strike designed to accommodate rim exit devices with a 3/4" Pullman latch. All components are completely encased within its 3/4" thick stainless steel housing, so no cutting on the frame is required for installation. Simply place the electric strike on the surface of the frame, align it with the exit latchbolt and install. Adjustments have never been easier as the base is now separate from the cover.

The 9500 exceeds Grade 1 standards for strength and performance. It is field selectable for fail secure and fail safe operation, and for 12 or 24 VDC. This unique electric strike complies with NFPA 80-07 guidelines for retrofit into fire-rated frames.

Features

- Installs in metal or wood frames (wood screws not included)
- Separate base and decorative cover for easy adjustments
- Stainless steel construction
- Tamper resistant
- Static strength 1,500 lbs
- Dynamic strength 70 ft-lbs
- Endurance 1,000,000 cycles
- Field selectable fail secure/fail safe
- Horizontal adjustability
- Non-handed
- Internally mounted solenoid
- Accommodates up to 3/4" Pullman latch
- SecuriCare five-year, no-fault, no questions asked warranty (Addition of SMART Pac® III extends the warranty to 10 years)

Options

- LBM - Latchbolt monitor
- LBSM - Latchbolt strike monitor

Accessories

- 9000-1xx Spacer Plate
- SMB Surface Mounting Box
- 9000-ASB 1/2" Aluminum Spacer Bracket
- 2005M3 SMART Pac® III
- 2001M Plug-in Bridge Rectifier
- 2004M ElectroLynx® adapter
- 2006M Plug-in Buzzer
- 9000-MTK Metal Template Kit



Grade 1

5 Year
SecuriCare
WarrantyRim Exit
DevicesField Selectable
(Fail secure/
Fail safe)

12/24

Dual Voltage
12/24

Fire Rated

Outdoor
RatedBurglary
Rated

9500 Series Surface Mounted Electric Strike

Certifications

- ANSI/BHMA A156.31, Grade 1
- CAL FIRE, 3776-1654:0101
- NFPA 80-07 Compliant
- RoHS Compliant
- UL 10C Fire Rated
- UL 294 Listed
- UL 305 Listed
- UL 1034 Burglary-Resistant Listed and Suitable for Outdoor Use

Specifications


Frame Application

- Metal
- Wood

Electrical

- Dual voltage 12 or 24 VDC
- 500 mA at 12 VDC continuous duty
- 250 mA at 24 VDC continuous duty

Dimensions

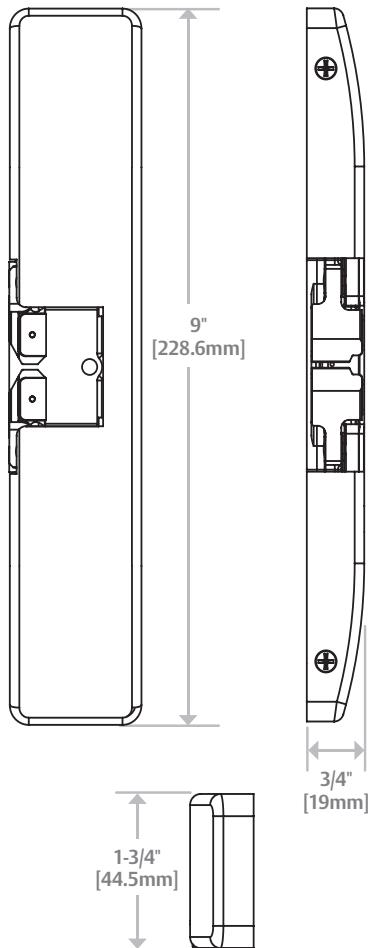

How to Order

| SERIES | FINISH | OPTION (S) |
|--|--|--|
| 9500 | – 630 | – LBM |
| 9500 Surface-Mounted Electric Strike for 3/4" Pullman Rim Exit Devices, fire rated; no faceplates required | 605 Bright Brass 606 Satin Brass 612 Satin Bronze 613 Bronze Toned 613E Dark Oxidized Satin Bronze Powder 629 Bright Stainless Steel 630 Satin Stainless Steel BSP Black Suede Powder | LBM Latchbolt Monitor LBSM Latchbolt Strike Monitor |

NOTE: Electric strike compatibility is determined at time of electric strike product release. ASSA ABLOY is not responsible for incompatibility of products that have changed in design or craftsmanship by their respective manufacturers. When compatibility is a concern, contact Customer Support for application assistance.