

ACCENTRA

ASSA ABLOY

Experience a safer
and more open world

EXIT DEVICE TRIM AND MULLIONS

Parts Manual



TABLE OF CONTENTS

Introduction/How to Order	3
Finishes	3
210F Series Plate Trim	
213F, 214F, 217F	4
620F Series Wide Escutcheon Trim	
620F, 621F	5-6
603F, 626F, 628F, 629F	7-8
627F	9-10
690F Series Wide Escutcheon Trim - Electrified	
690F, 691F	11-12
650F Series Wide Escutcheon Trim	
651F	5-6
656F, 658F	13-14
350F Series Wide Escutcheon Trim	
356F, 358F	15-16
420F Series Wide Escutcheon Trim	
420F, 421F	17
426F, 428F, 429F	18-19
427F	20-21
630F Series Wide Pull/Thumbpiece Escutcheon Trim	
630F, 631F	22-23
632F, 634F	24-25
633F, 635F	26-27
660F Series Wide Pull/Thumbpiece Escutcheon Trim	
661F	22-23
662F	24-25
670F Series Wide Pull/Thumbpiece Escutcheon Trim	
673F, 675F	28-29
500F Series Narrow Escutcheon Trim	
500F, 501F, 503F, 507F	30-31
506F, 508F, 509F	32-33
510F Series Narrow Pull/Thumbpiece Trim	
512F, 514F	34-35
513F, 517F	36-37
518F, 519F	38-39
480F Series Narrow Offset Pull Escutcheon Trim	
480F, 481F, 482F, 483F	40
680F Series Wide Offset Pull Escutcheon Trim	
680F, 681F, 684F	41
440F Series Rose Trim	
441F, 446F, 448F, 449F	42-43
540F Series Rose Trim	
541F, 546F, 548F, 549F	44-45
580F Series Rose with Escutcheon Plate Trim	
581F, 586F, 588F, 589F	46-47
Lever Designs	48-49
Cylinders	50
Mullions	51-52
Handing	53

INTRODUCTION

Installation Notes

1. Any retrofit or other field modification to a fire rated opening can potentially impact the fire rating of the opening, and ASSA ABLOY ACCENTRA™ makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire rated opening, or specifying and installing a new fire rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.
2. Refer to the templates and installation instructions for complete door preparation and installation requirements.
3. Machine screws are provided for steel reinforced doors, threaded-to-the-head AB Type screws are provided for wood door applications. In addition, sex nuts and bolts are provided for fire rated devices and are optional for non-rated devices. It is recommended that sex nuts and bolts be used for all exit device applications. This will improve the performance and extend the life of the product.

How to Order Parts

1. In order to simplify the ordering procedure and maintain regulatory compliance, parts are only available as listed
2. To order parts, provide the appropriate quantity, part number, finish, hand (when required) and description as directed and illustrated below.

For example, use the following configuration to order:

A) ten escutcheon assemblies in satin chrome

B) one AU lever assembly in bright brass

	Quantity	Part Number	Finish	Hand	Description
A	10	60-7000-0416-FIN	626	—	Escutcheon Assemblies
B	1	60-7000-0095-FIN	605	—	Lever Assembly

For assistance, contact your authorized ASSA ABLOY ACCENTRA™ distributor, sales agency or visit our website at www.accentra-assaabloy.com.

3. For "X" in part number, specify finish required:

- For 629 or 630 substitute "X" with "7"
- For all other finishes substitute "X" with "2"

Finishes

ANSI/BHMA Code	Finish Description
600	Primed for Painting (Mullions)
605	Bright Brass, Clear Coated
606	Satin Brass, Clear Coated
611	Bright Bronze, Clear Coated
612	Satin Bronze, Clear Coated
613E	Dark Oxidized Satin Bronze - equivalent
619*	Satin Nickel Plated, Clear Coated
626*	Satin Chrome Plated
628	Satin, Clear Anodized (Mullions)

ANSI/BHMA Code	Finish Description
629	Bright Stainless Steel
630*	Satin Stainless Steel
689	Aluminim Painted
691	Light Bronze Painted
693	Black Painted
695	Dark Amber Coat (Mullions)
BSP	Black Suede Powder Coat
WSP	White Suede Powder Coat


MicroShield®

*Finish available with MicroShield antimicrobial coating, additional finishes by special application. Consult factory for availability.




210 SERIES PLATE TRIM


Compatible with 1800, 2100, 6000 and 7000 Series Wide & Narrow Stile Exit Devices

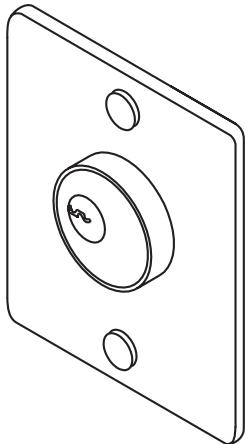


Nightlatch Access by Key
60-2100-0090-FIN

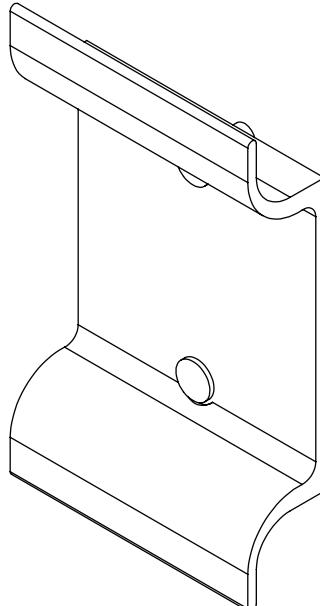213F

Dummy Trim Pull Plate
60-2100-0020-FIN

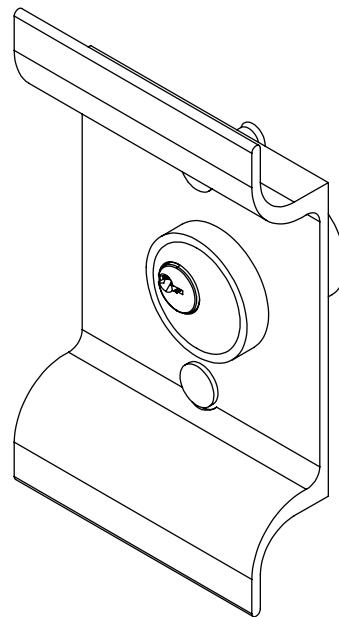214F


Night Latch Cylinder by Pull
60-2100-0021-FIN

217F

Cylinder Ring
Standard: 1765-250
Others: Supplied with cylinder



Finger Pull
214F, Pull Only
217F, Pull x Cylinder

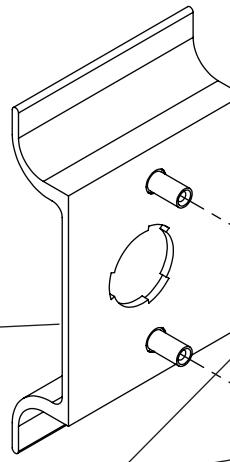

Cylinder Housing
60-2000-6206-082

(2) #10-24 x 3/4" PTHMS
81-0015-0516-048

**(2) Cylinder
Mounting Screws**
Standard: 12-24 thread
60-7000-1235-048
Others: Supplied with cylinder

620F, 621F, 651F TRIM


Compatible with 1500, 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices

Item	Part No.	Description
1	60-7000-0648-FIN 60-7000-0614-FIN 60-7030-0193-FIN	Escutcheon Assembly 620F 621F 651F
3	See Chart Page 50	Cylinder, Rim or Mortise*
5	60-2000-6206-082	Housing, Cylinder 621F
6	60-7000-1235-048	Screw, Cylinder 621F Mounting (2)
17	81-9500-1404-FIN 81-0013-0670-FIN 99-9999-X156-FIN	Screw Packet, Mtg. Consists of the following: Screw, 1/4-20 x 1" OPHMS (2) Washer, #14 Finish (2)

* See page 50 for cylinder collar applications.


620F, 621F, 651F TRIM

Compatible with 1500, 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices

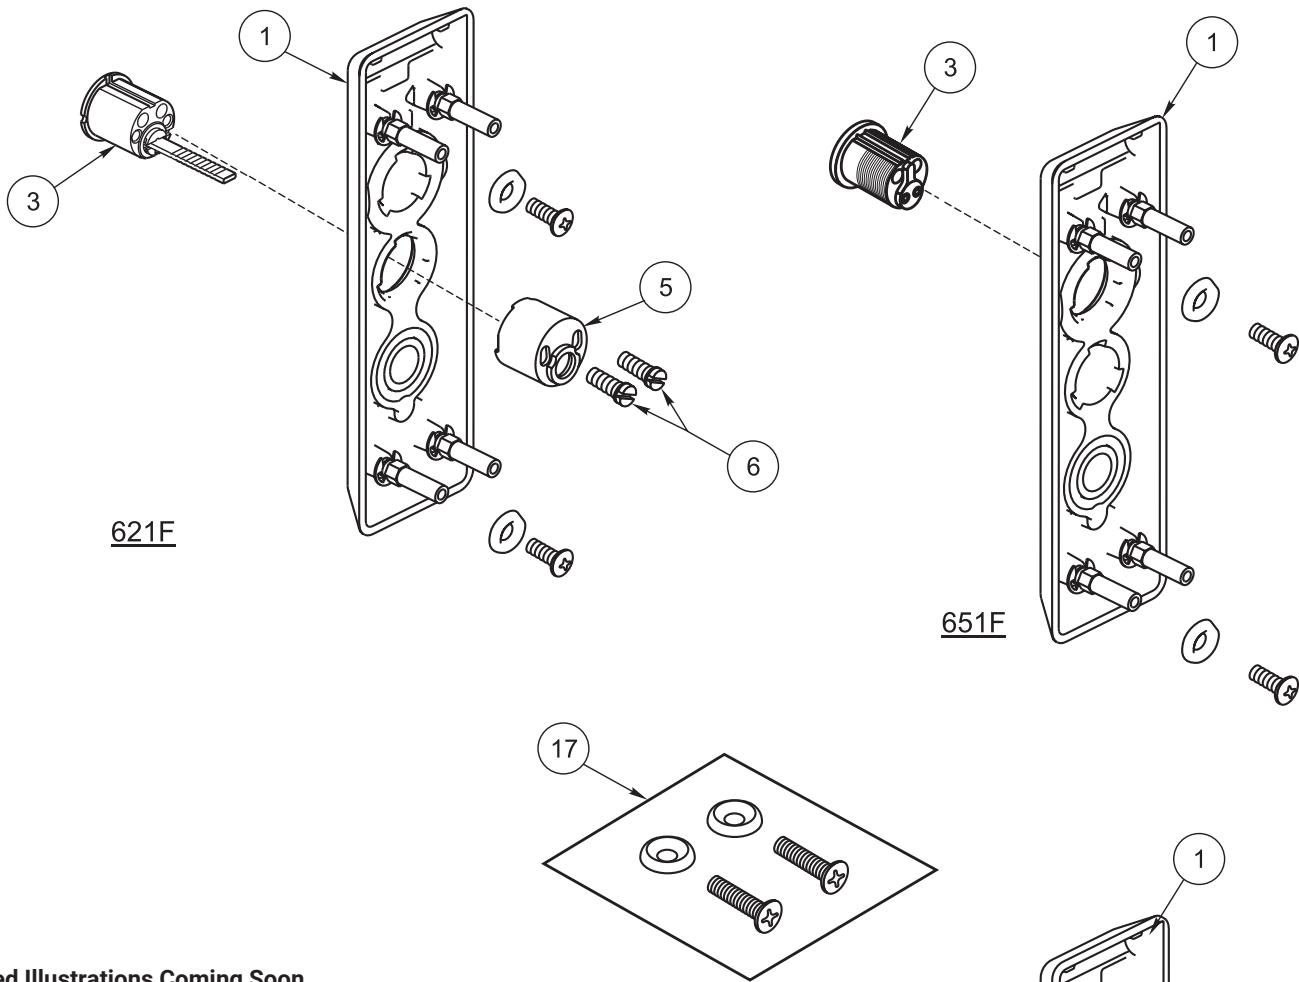

Revised Illustrations Coming Soon.
Contact Technical Support with any questions.

(EO) Blank Plate	(NL) Access by Key	(NL) Access by Key
01	03	07
620F	621F	651F

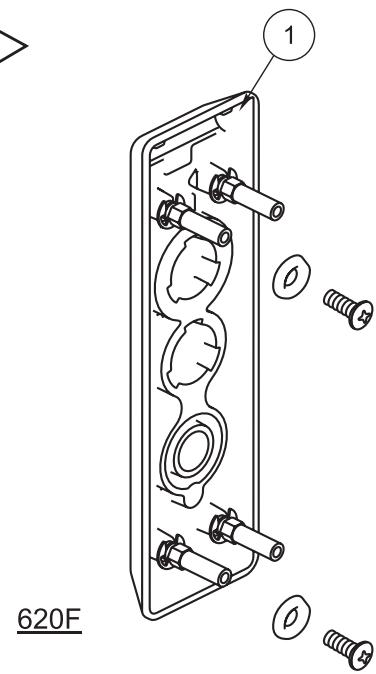

603F, 626F, 628F, 629F TRIM


Compatible with 1500, 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices

Item	Part No.	Description
1	60-7000-0612-FIN 60-7000-0615-FIN	Escutcheon Assembly 603F, 626F 628F, 629F
2	See Chart pages 48-49	Lever/Thumbturn Assy. (603F)
3	See Chart page 50	Cylinder, Rim*
5	60-7000-0215-000	Housing & Cam Assy.
6	60-7000-1235-048	Screw, Cylinder Mounting (2)
7	81-0016-2200-999	Screw, NL
8	60-7000-9002-999	Driver Gear Assembly
9	81-4414-0308-036	Screw, Tailpiece Plate, #6 x 3/8", PHT-T-PH (2)
10	60-7000-0611-059 60-7000-0213-059	Tailpiece Assembly 1-3/4" Door Without Shim Kit 2" - 2-1/4" Door or Std. Door with Shim Kit
11	60-7000-1328-048	Gear, Drive 603F, 626F, 628F (1) 629F (2)
12	60-7000-6220-999	Universal Spring Hub, Lever
14	99-9958-0047-999	Cotter Pin
15	99-9999-3516-999	Nut, Spindle
16	60-7000-9001-999	Thimble Insert, Nylon (Levers) Not Shown
17	81-9500-1404-FIN 81-0013-0670-FIN 99-9999-X156-FIN	Screw Packet, Mtg. Consists of the following: Screw, 1/4-20 x 1" OPHMS (2) Washer, #14 Finish (2)
18	60-7000-1220-999	Spring, Grip Return Levers, Universal Spring
19	60-7000-1306-999	Spring Not Shown Under Tailpiece
20	60-7000-1365-999	Hex Nut / Bushing for Spring Not Shown
21	60-7000-1236-059	Washer Under Tailpiece (2) Not Shown

*See page 50 for cylinder collar applications.

603F, 626F, 628F, 629F TRIM

Compatible with 1500, 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices

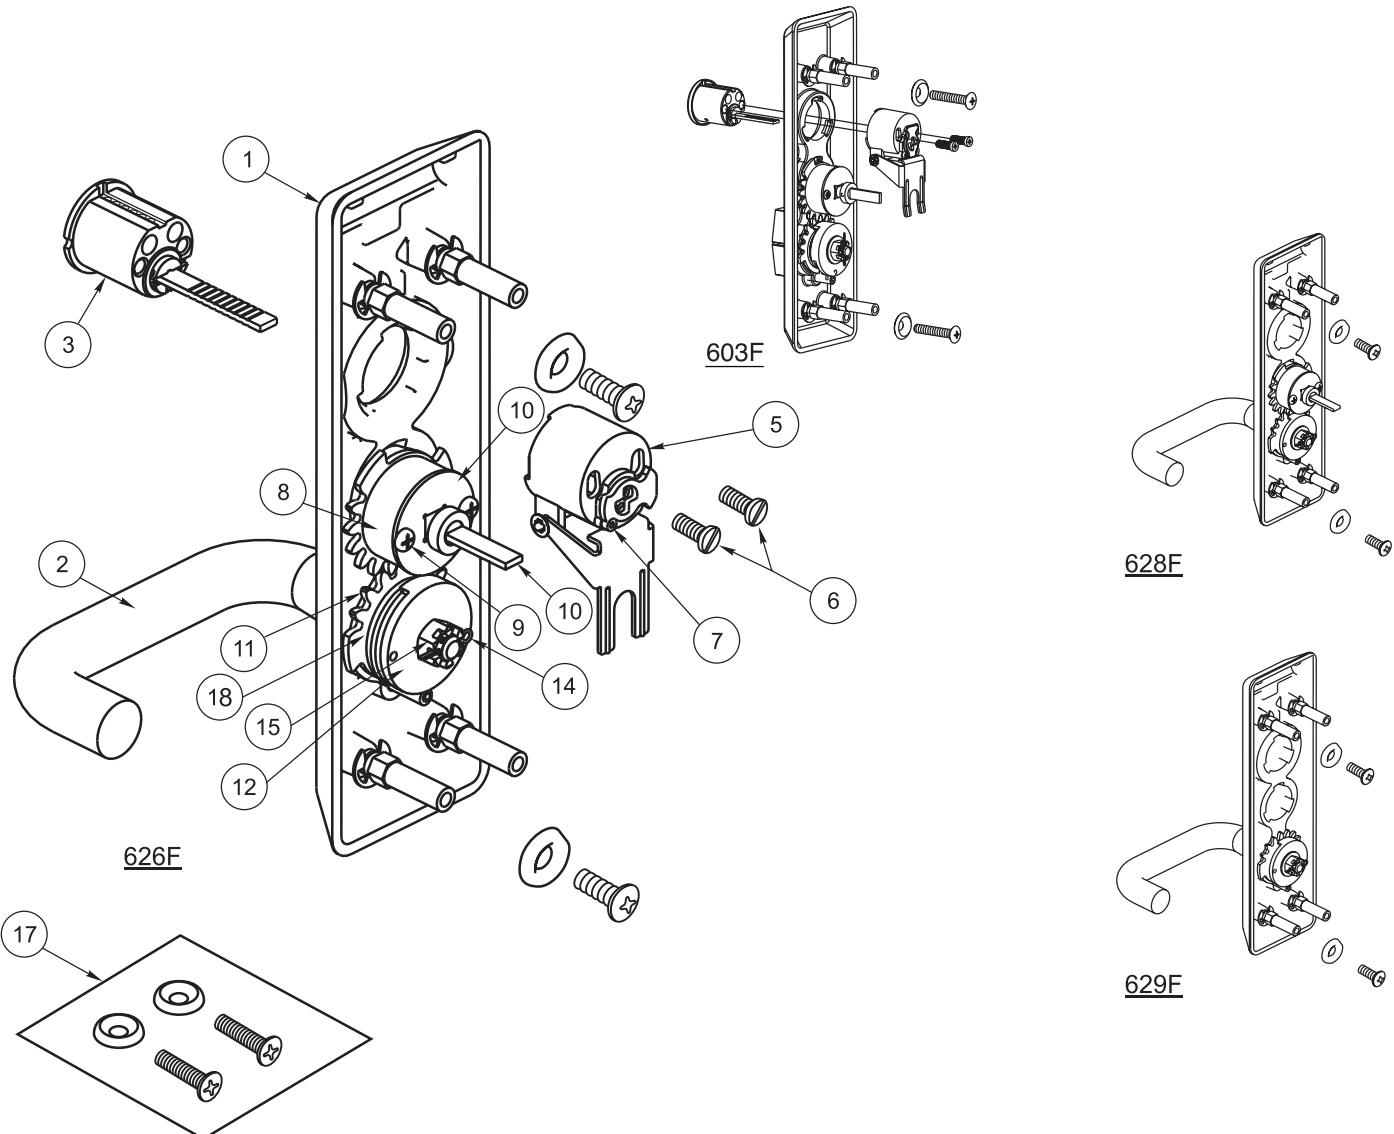

Revised Illustrations Coming Soon.
Contact Technical Support with any questions.

Cylinder Controls Thumturn	Cylinder Controls Lever	Access by Key and Lever	(Passage) Active Lever or (DT) Free Wheeling Lever	(DT) Rigid Lever
11/12	08	09	—	02
603F	626F	626F	628F	629F

627F TRIM


Compatible with 1500, 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices

Item	Part No.	Description
1	60-7000-0705-FIN	Escutcheon Assy. 627F
2	See Chart pages 48-49	Lever
3	See Chart page 50	Cylinder, Rim*
5	60-2000-6206-082	Housing, Cylinder
6	60-7000-1235-048	Screw, Cylinder Mounting (2)
11	60-7000-1328-048	Gear, Drive
12	60-7000-6220-999	Universal Spring Hub, Lever
14	99-9958-0047-999	Cotter Pin
15	99-9999-3516-999	Nut, Spindle
16	60-7000-9001-999	Thimble Insert, Nylon (Levers) Not Shown
17	81-9500-1404-FIN 81-0013-0670-FIN 99-9999-X156-FIN	Screw Packet, Mtg. Consists of the following: Screw, 1/4-20 x 1" OPHMS (2) Washer, #14 Finish (2)
18	60-7000-1220-999	Spring, Grip Return Levers, Universal Spring


*See page 50 for cylinder collar applications.

627F TRIM

Compatible with 1500, 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices

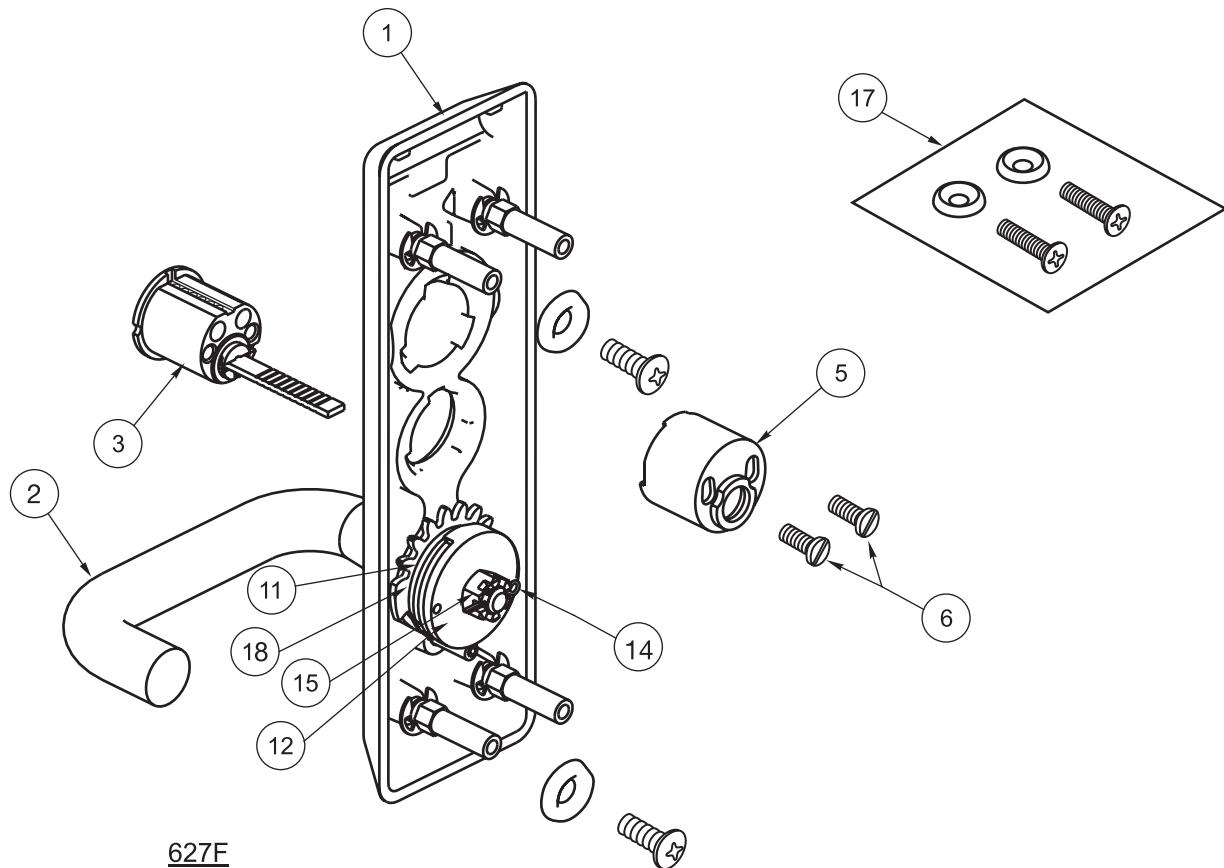

**Revised Illustrations Coming Soon.
Contact Technical Support with any questions.**

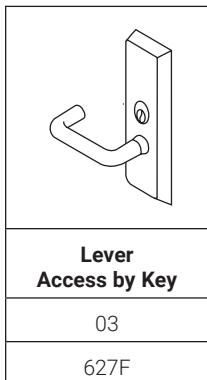

690F, 691F TRIM

Compatible with 6000 and 7000 Series Wide Stile Exit Devices

Information Coming Soon.
Contact Technical Product Support at
techsupport.accentra@assaabloy.com for details.

690F, 691F TRIM

Compatible with 6000 and 7000 Series Wide Stile Exit Devices

Information Coming Soon.
Contact Technical Product Support at
techsupport.accentra@assaabloy.com for details.

656F, 658F TRIM


Compatible with 6000 and 7000 Series Wide Stile Exit Devices

Item	Part No.	Description
1	60-7000-0703-FIN 60-7000-0702-FIN	Escutcheon Assembly Cylinder x Lever (656F) Blank x Lever (658F)
2	See Chart pages 48-49	Lever
3	See Chart Page 50	Cylinder, Mortise*
14	99-9958-0047-999	Cotter Pin
15	99-9999-3518-999	Nut, Spindle
16	60-7000-9001-999	Thimble Insert, Nylon (Levers) Not Shown
17	81-9500-1404-FIN 81-0013-0670-FIN 99-9999-X156-FIN	Screw Packet, Mtg. Consists of the following: Screw, 1/4-20 x 1" OPHMS (2) Washer, #14 Finish (2)
24	60-7000-1328-048	Gear
25	60-7030-1045-048 60-7030-1026-048	Spindle 1-3/4" - 2-1/4" 2-1/4" - 3"

* See page 50 for cylinder collar applications

656F, 658F TRIM

Compatible with 6000 and 7000 Series Wide Stile Exit Devices

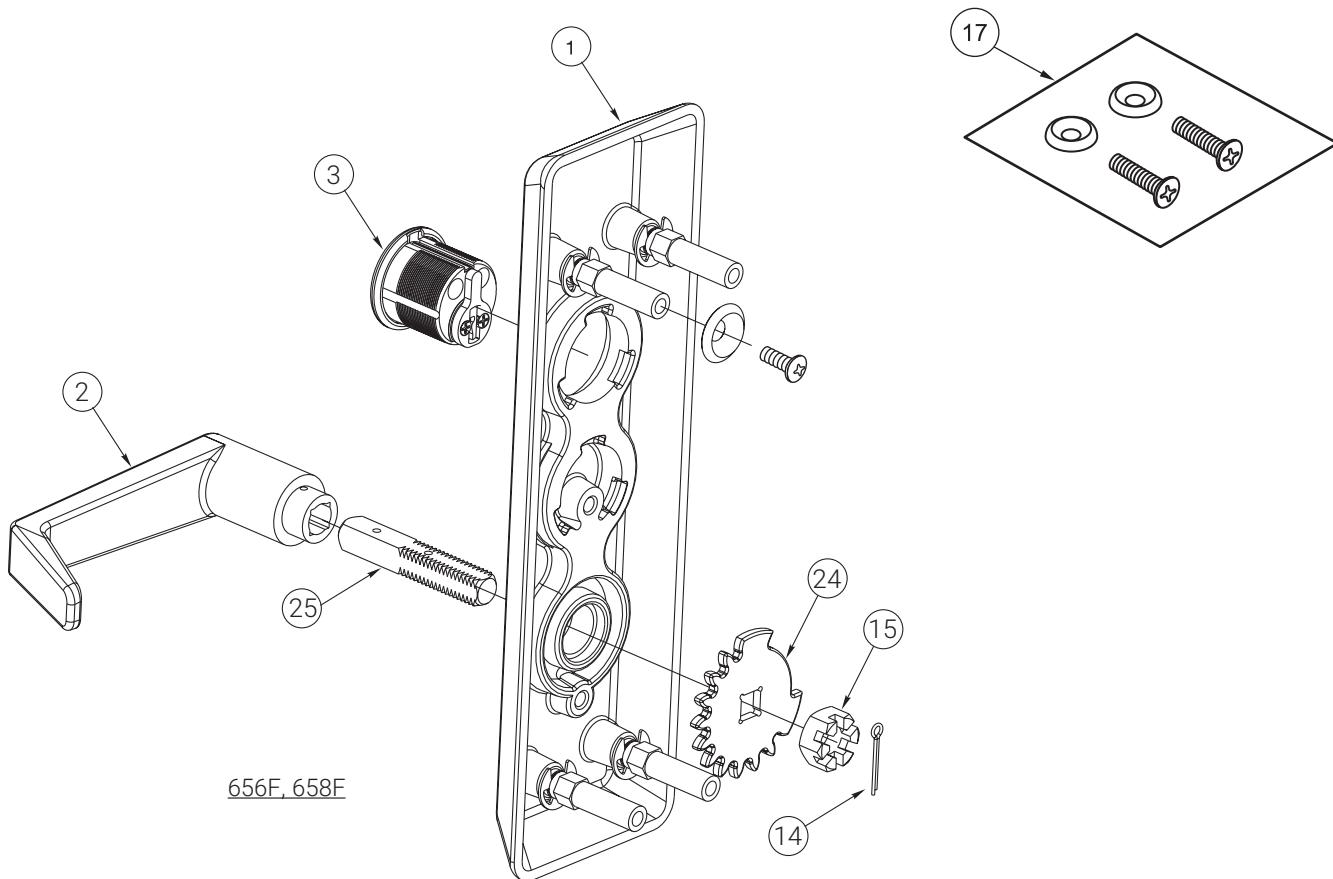

Revised Illustrations Coming Soon.
 Contact Technical Support with any questions.

Cylinder Controls Lever	(DT) Rigid Lever	(Passage) Active Lever or (DT) Free Wheeling Lever
08/09	02	—
656F	658F	658F

356F, 358F TRIM

Compatible with 1500 Series Wide Stile Exit Devices

Information Coming Soon.

Contact Technical Product Support at
techsupport.accentra@assaabloy.com for details.

356F, 358F TRIM

Compatible with 1500 Series Wide Stile Exit Devices


Information Coming Soon.
Contact Technical Product Support at
techsupport.accentra@assaabloy.com for details.

420F, 421F TRIM


Compatible with 1500, 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices

Item	Part No.	Description
1	60-7000-0141-FIN 60-7000-0145-FIN	Escutcheon Assembly 420F 421F
3	See Chart page 50	Cylinder, Rim*
5	60-2000-6206-082	Housing Cylinder
6	60-7000-1235-048	Screw, Cylinder Mounting (2)
17	81-9500-1404-FIN 81-0013-0670-FIN 99-9999-X156-FIN	Screw Packet, Mtg. Consists of the following: Screw, 1/4-20 x 1" OPHMS (2) Washer, #14 Finish (2)

*See page 50 for cylinder collar applications.

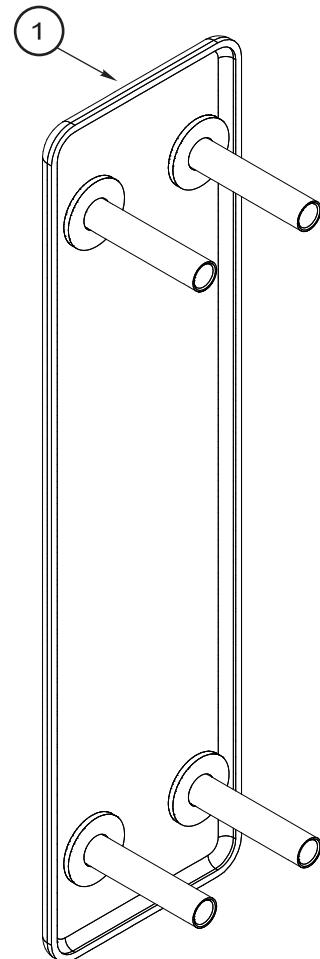

420F

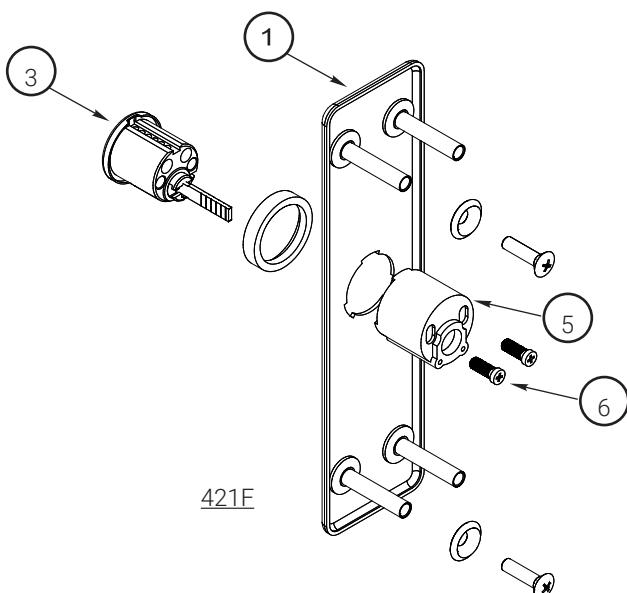

421F

	(EO) Blank Plate	Access by Key
ANSI #	01	03
Trim	420F	421F

426F, 428F, 429F TRIM


Compatible with 1500, 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices

Item	Part No.	Description
1	60-7000-0416-FIN 60-7000-0417-FIN	Escutcheon Assembly 426F 428F, 429F
2	See Charts pages 48-49	Lever Assy.
3	See Chart page 50	Cylinder, Rim*
5	60-7000-0215-000	Housing, Cylinder
6	60-7000-1235-048	Screw, Cylinder Mounting (2)
7	81-0016-2200-999	Screw, NL
8	60-7000-0046-000	Driver Gear Assembly
9	81-4414-0308-036	Screw, Tailpiece Plate, #6 x 3/8", PHT-T-PH (2)
10	60-7000-0216-059 60-7000-0217-059	Tailpiece Assembly 1-3/4" Door Without Shim Kit 2" - 2-1/4" Door or Std. Door with Shim Kit
11	60-7000-1328-048	Gear, Drive 426F, 428F (1) 429F (2)
12	60-7000-6220-999	Universal Spring Hub, Lever
14	99-9958-0047-999	Cotter Pin
15	99-9999-3516-999	Nut, Spindle
16	60-7000-9001-999	Thimble Insert, Nylon (Not Shown)
17	81-9500-1404-FIN 81-0013-0670-FIN 99-9999-X156-FIN	Screw Packet, Mtg. Consists of the following: Screw, 1/4-20 x 1" OPHMS (2) Washer, #14 Finish (2)
18	60-7000-1220-999	Spring, Grip Return Levers, Universal Spring
19	60-7000-1306-999	Spring Under Tailpiece (Not Shown)
21	60-7000-1236-059	Washer Under Tailpiece (2) (Not Shown)
22	60-7000-1237-999	Washer Gear
23	60-7000-1305-059	Bushing (Not Shown)
24	60-7000-X055-FIN	Front Bearing (Not Shown)

*See page 50 for cylinder collar applications.


426F, 428F, 429F TRIM

Compatible with 1500, 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices

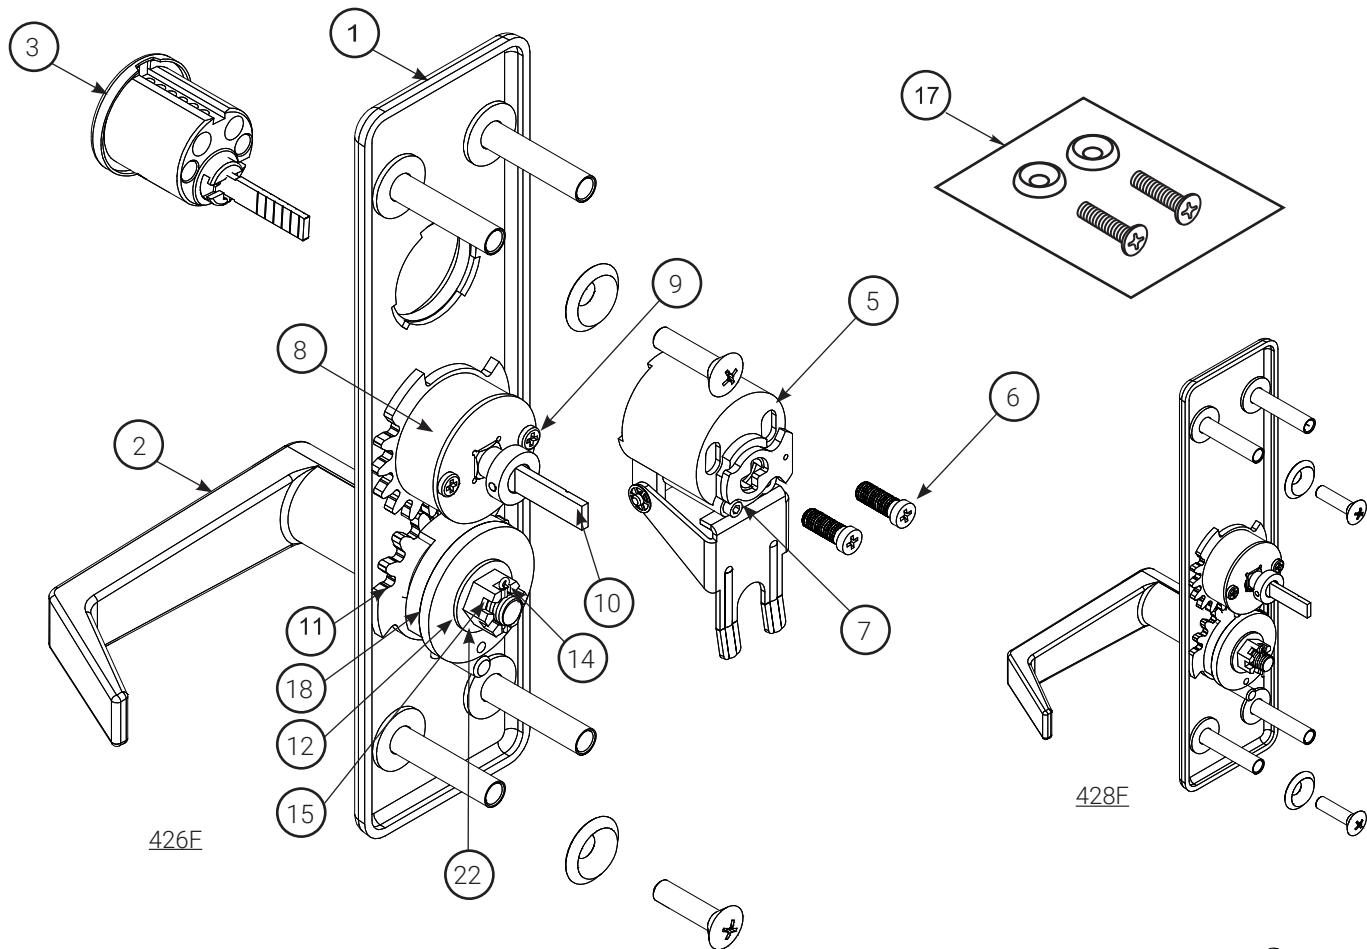

Revised Illustrations Coming Soon.
Contact Technical Support with any questions.

	Access by Key and Lever	Cylinder Controls Lever	Active Lever (Passage)	Free Wheeling Lever (DT)	(DT) Rigid Lever
ANSI #	09	08	14	02	02
Trim	426F		428F	428F	429F

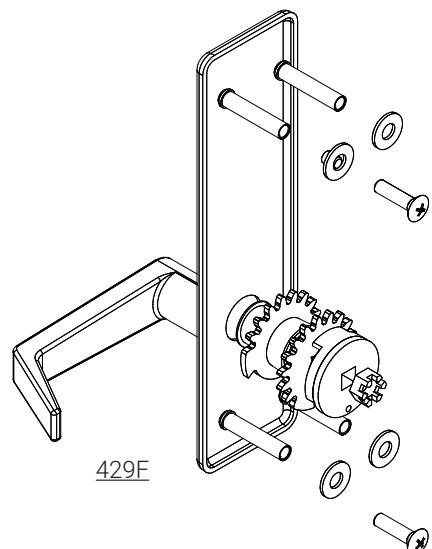

427F TRIM


Compatible with 1500, 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices


Item	Part No.	Description
1	60-7000-0526-FIN	Escutcheon Assembly 427F
2	See Charts pages 48-49	Lever Assy.
3	See Chart page 50	Cylinder, Rim*
5	60-2000-6206-048	Housing cylinder
6	60-7000-1235-048	Screw, Cylinder Mounting (2)
11	60-7000-1328-048	Gear, Drive
12	60-7000-6220-999	Universal Spring Hub, Lever
14	99-9958-0047-999	Cotter Pin
15	99-9999-3516-999	Nut, Spindle
16	60-7000-9001-999	Thimble Insert, Nylon (Levers) (Not Shown)
17	81-9500-1404-FIN 81-0013-0670-FIN 99-9999-X156-FIN	Screw Packet, Mtg. Consists of the following: Screw, 1/4-20 x 1" OPHMS (2) Washer, #14 Finish (2)
18	60-7000-1220-999	Spring, Grip Return Levers, Universal Spring
19	60-7000-X055-FIN	Front Bearing
20	60-7000-1236-059	Washer Under Tailpiece (2) (Not Shown)

*See page 50 for cylinder collar applications.

427F TRIM

Compatible with 1500, 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices

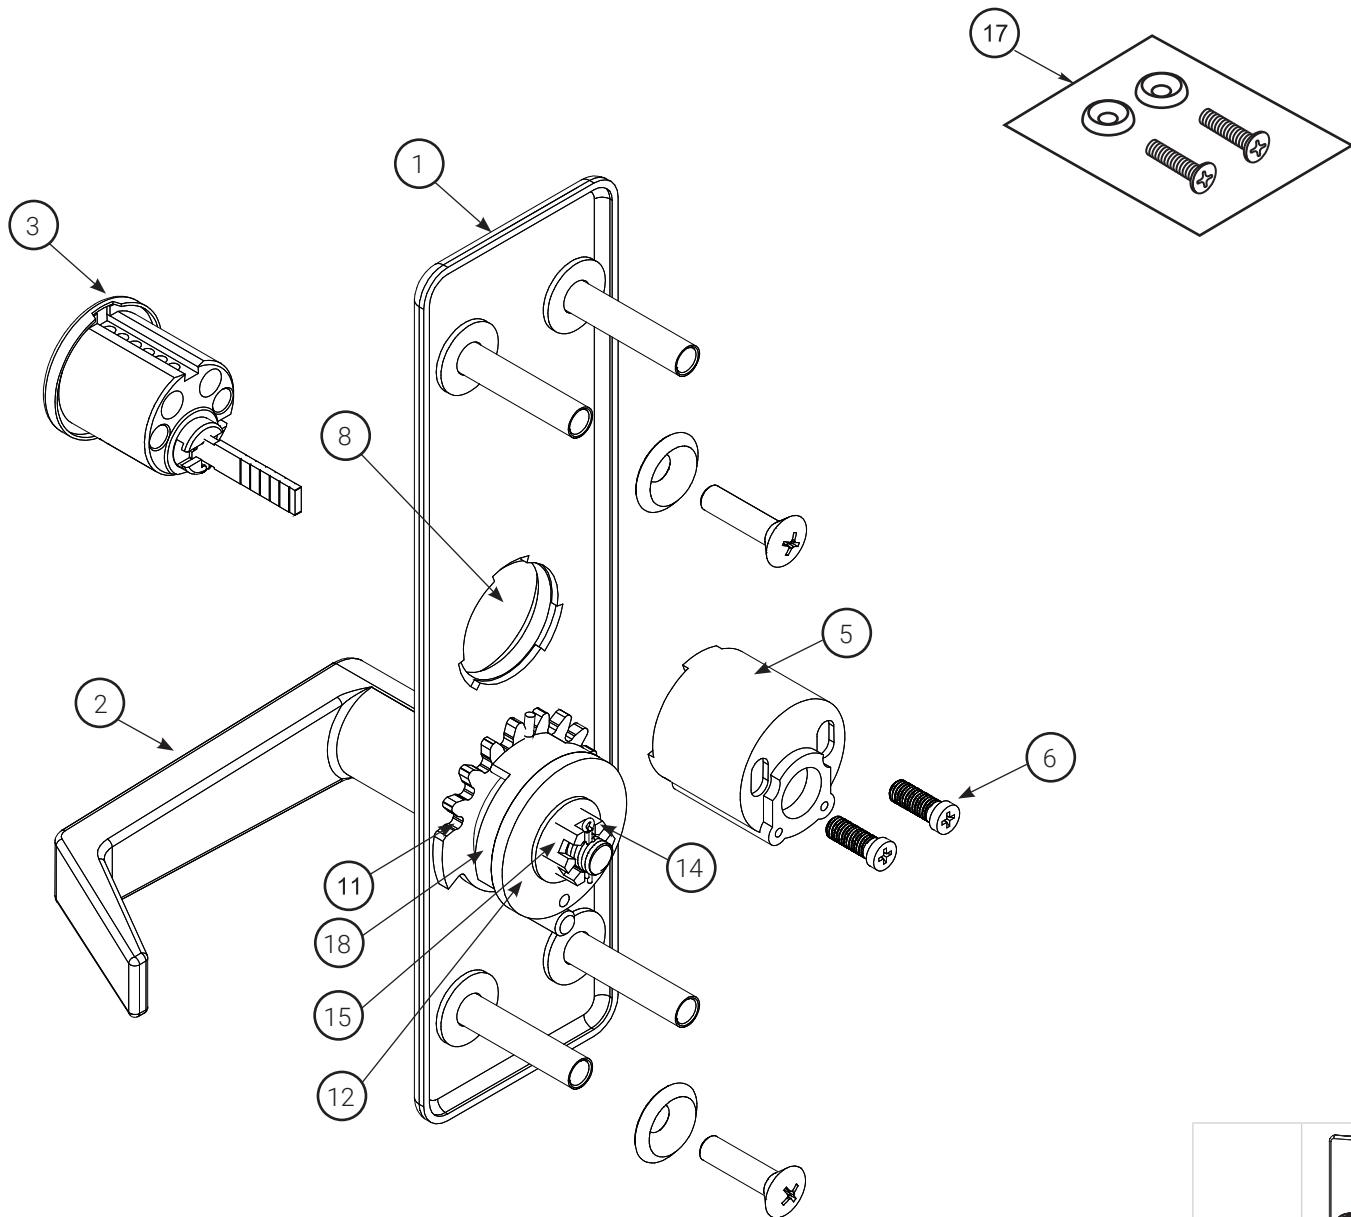

	Lever Access by Key
ANSI #	03
Trim	427F

630F, 631F, 661F TRIM




Compatible with 1500, 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices

Item	Part No.	Description
1	60-7000-0710-FIN 60-7000-0712-FIN 60-7000-0716-FIN	Escutcheon Assembly 630F 631F 661F
3	See Chart Page 50	Cylinder, Mortise or Rim*
5	60-2000-6206-082	Housing, Cylinder, Rim
6	60-7000-1235-048	Screw, Cylinder Mtg. (2)
17	81-9500-1415-FIN 81-0013-0670-FIN 99-9999-X156-FIN	Screw Packet, Mtg. Consists of the following: Screw, 1/4-20 x 1" OPHMS (3) Washer, #14 Finish (3)
38	60-0010-X639-FIN	Pull, Straight


*See page 50 for cylinder collar applications.

630F, 631F, 661F TRIM

Compatible with 1500, 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices

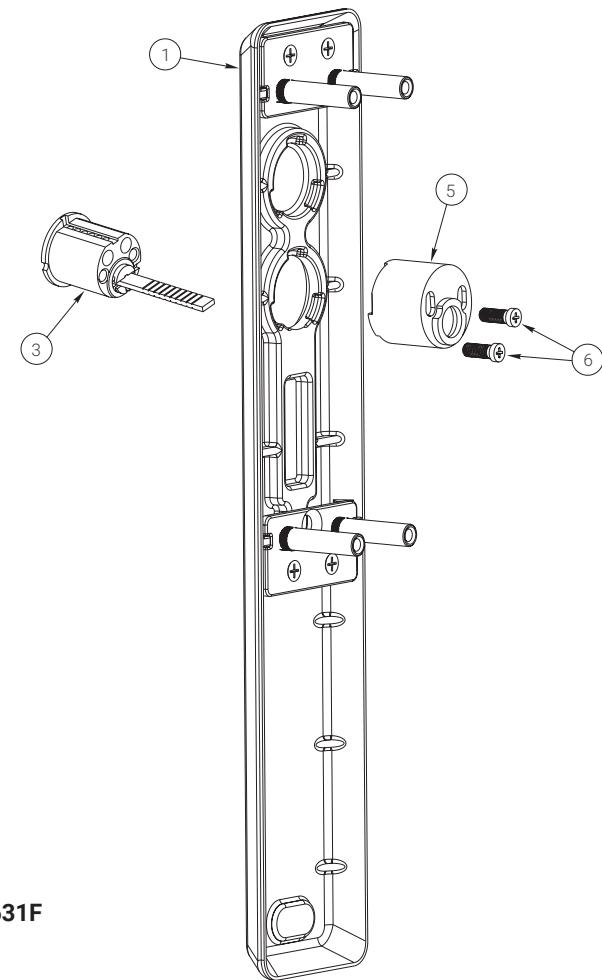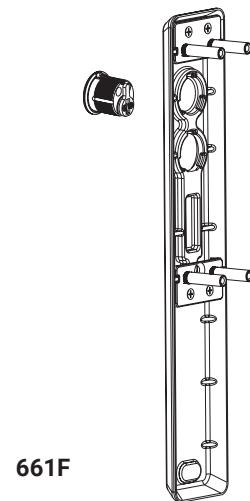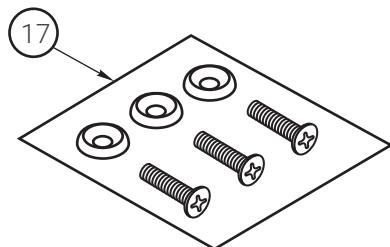**631F****661F**

(BT) Blank Plate	(NL) Access by Key	(NL) Access by Key
01	03	03
630F	631F	661F

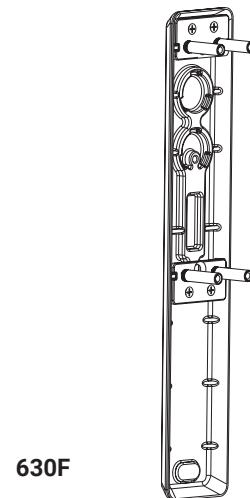**630F**

632F, 634F, 662F TRIM


Compatible with 1500, 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices

Item	Part No.	Description
1	60-7000-0713-FIN 60-7000-0711-FIN 60-7000-0717-FIN	Escutcheon Assembly 632F 634F 662F
3	See Chart Page 50	Cylinder, Mortise or Rim*
5	60-2000-6206-082	Housing, Cylinder
6	60-7000-1235-048	Screw, Cylinder Mtg. (2)
17	81-9500-1415-FIN 81-0013-0670-FIN 99-9999-X156-FIN	Screw Packet, Mtg. Consists of the following: 1/4-20 x1" (3) OHPMS Washer #14 Finish (3)
38	60-0010-X639-FIN	Pull, Straight
39	60-7000-1039-048	Screw Post
40	99-9999-7154-036	Lock Washer, Screw Post


*See page 50 for cylinder collar applications.

632F, 634F, 662F TRIM

Compatible with 1500, 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices

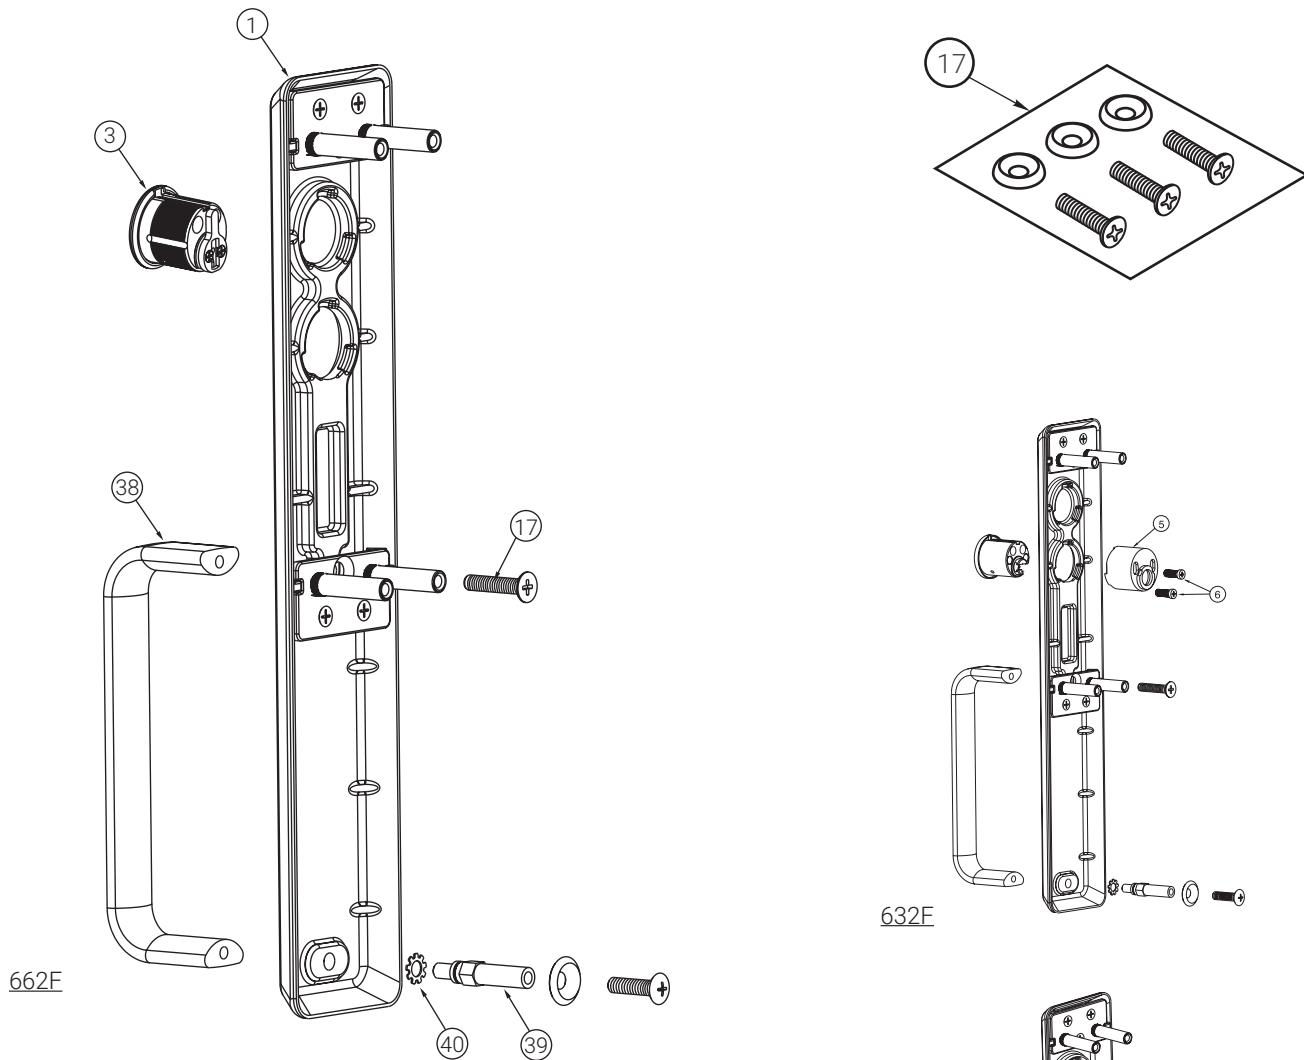

632F

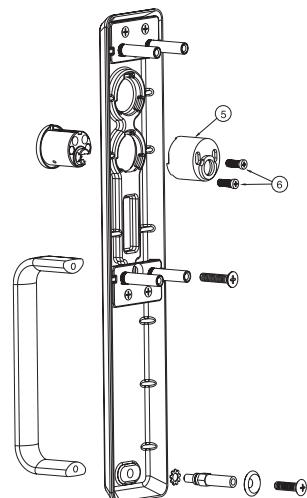

634F

(NL) Cylinder by Pull	(DT) Full Plate	(NL) Cylinder by Pull
03	02	03
632F	634F	662F

633F, 635F TRIM


Compatible with 1500, 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices

Item	Part No.	Description
1	60-7000-0715-FIN 60-7000-0714-FIN	Escutcheon Assembly 633F 635F
2	60-7000-X501-FIN	Thumbpiece
3	See Chart Page 50	Cylinder, Rim* (633F)
5	60-7000-0215-000	Housing & Cam Assembly
6	60-7000-1235-048	Screw, Cylinder Mounting (2)
7	81-0016-2200-999	Screw, NL Function
9	81-4414-0308-036	Screw, Tailpiece Plate, #6 x 3/8 PHT-T-PH (2)
10	60-7000-0611-059	Tailpiece Assembly
17	81-9500-1415-FIN 81-0013-0670-FIN 99-9999-X156-FIN	Screw Packet, Mtg. Consists of the following: Screw, 1/4-20 x 1" OPHMS (3) Washer, #14 Finish (3)
19	60-7000-1306-999	Spring Under Tailpiece
20	60-7000-1305-999	Hex Nut/Bushing for Spring
38	60-0010-X639-FIN	Pull, Straight
39	60-7000-1039-048	Screw Post
40	99-9999-7154-036	Lock Washer, Screw Post
41	99-9999-5697-999	Spring, Thumbpiece (2)
42	60-7000-1190-059	Slider, Thumbpiece
43	60-7000-0214-000	Housing, Tailpiece Assy.
48	60-7000-1045-059	Pin, Thumbpiece
49	60-7000-1189-059	Thumbpiece Support Bracket

* See page 50 for cylinder collar applications.


633F, 635F TRIM

Compatible with 1500, 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices

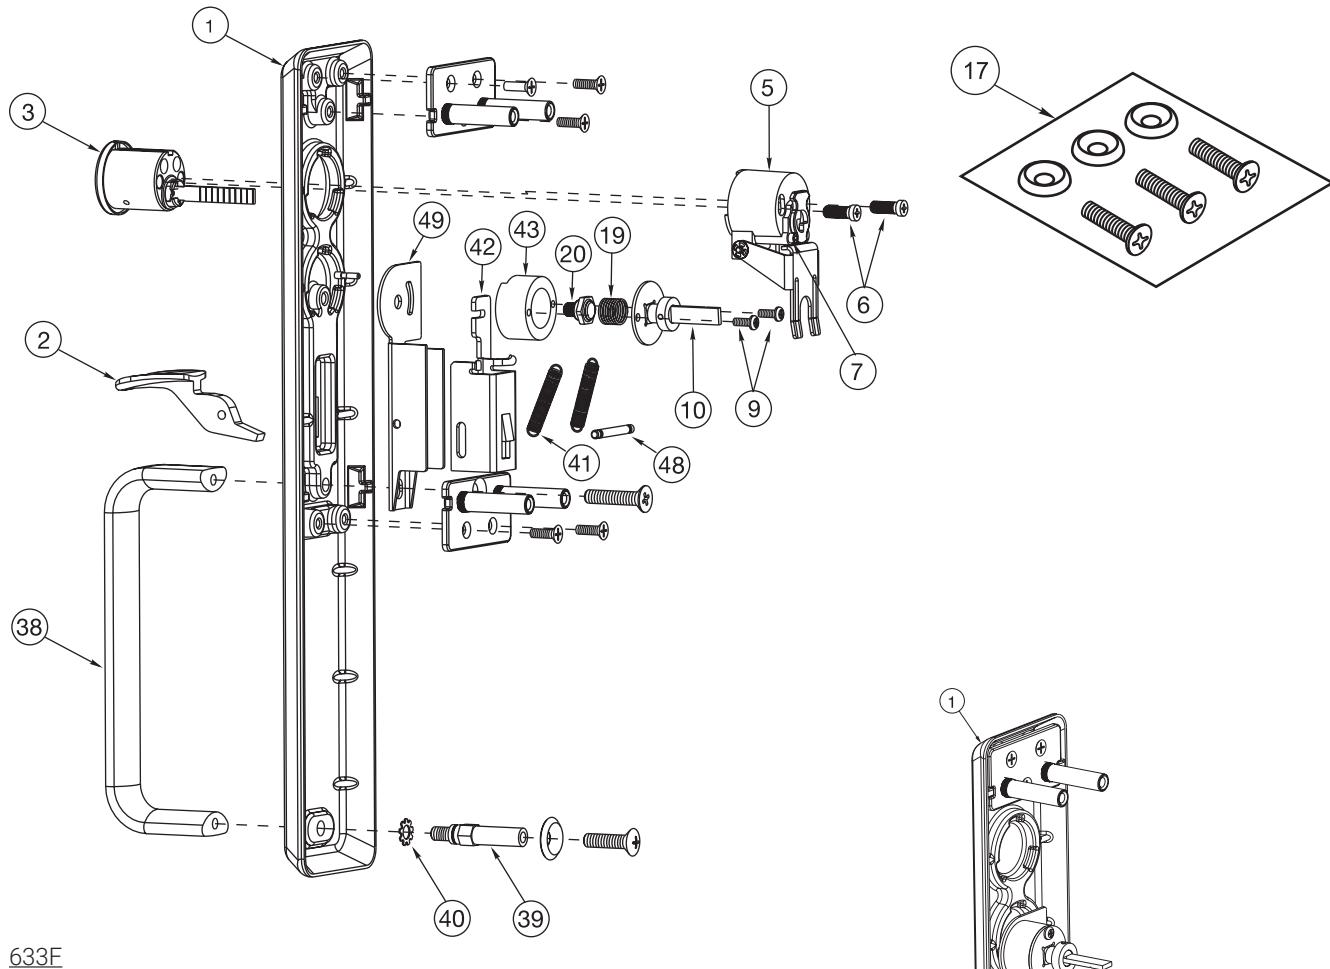

633F

Cylinder Controls T-Piece	Access by Key and T-Piece	(Passage) Active T-Piece
05	06	—
633F	633F	635F

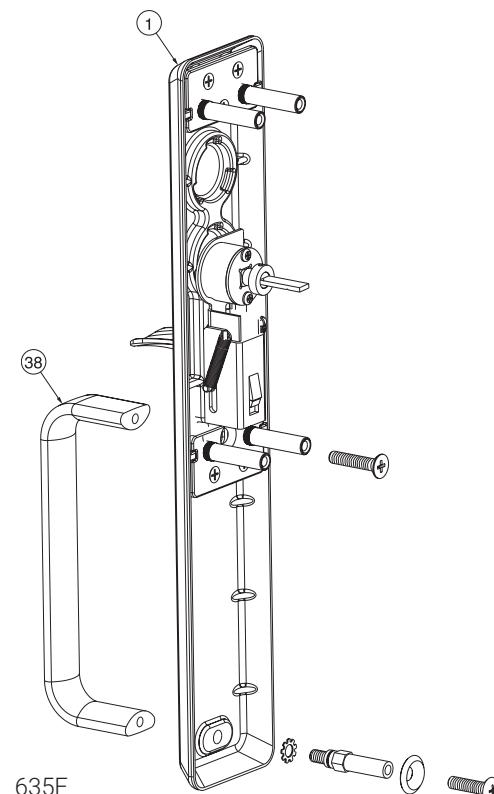

635F

673F, 675F TRIM


Compatible with 1500, 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices

Item	Part No.	Description
1	60-7000-0718-FIN 60-7000-0717-FIN	Escutcheon Assembly 673F 675F
2	60-1530-X114-FIN	Thumbpiece
3	See Chart Page 50	Cylinder, Mortise* 673F
17	81-9500-1415-FIN 81-0013-0670-FIN 99-9999-X156-FIN	Screw Packet, Mtg. Consists of the following: Screw, 1/4-20 x 1" OPHMS (3) Washer, #14 Finish (3)
38	60-0010-X639-FIN	Pull, Straight
39	60-7000-1039-048	Screw Post
40	99-9999-7154-036	Lock Washer, Screw Post
41	60-1530-1133-999	Spring, Thumbpiece
44	81-0011-0674-036	Screw, 1/4-20 x 1-1/4 FHPMS
45	60-7000-1460-048	Thumbpiece, Trim Spacer (Not Shown)
46	60-1500-1806-059	Bracket, Thumbpiece
48	60-1500-7244-000	Pin, Thumbpiece
49	99-9999-4517-999	Tru-Arc Ring (2)

*See page 50 for cylinder collar applications.

673F, 675F TRIM

Compatible with 1500, 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices

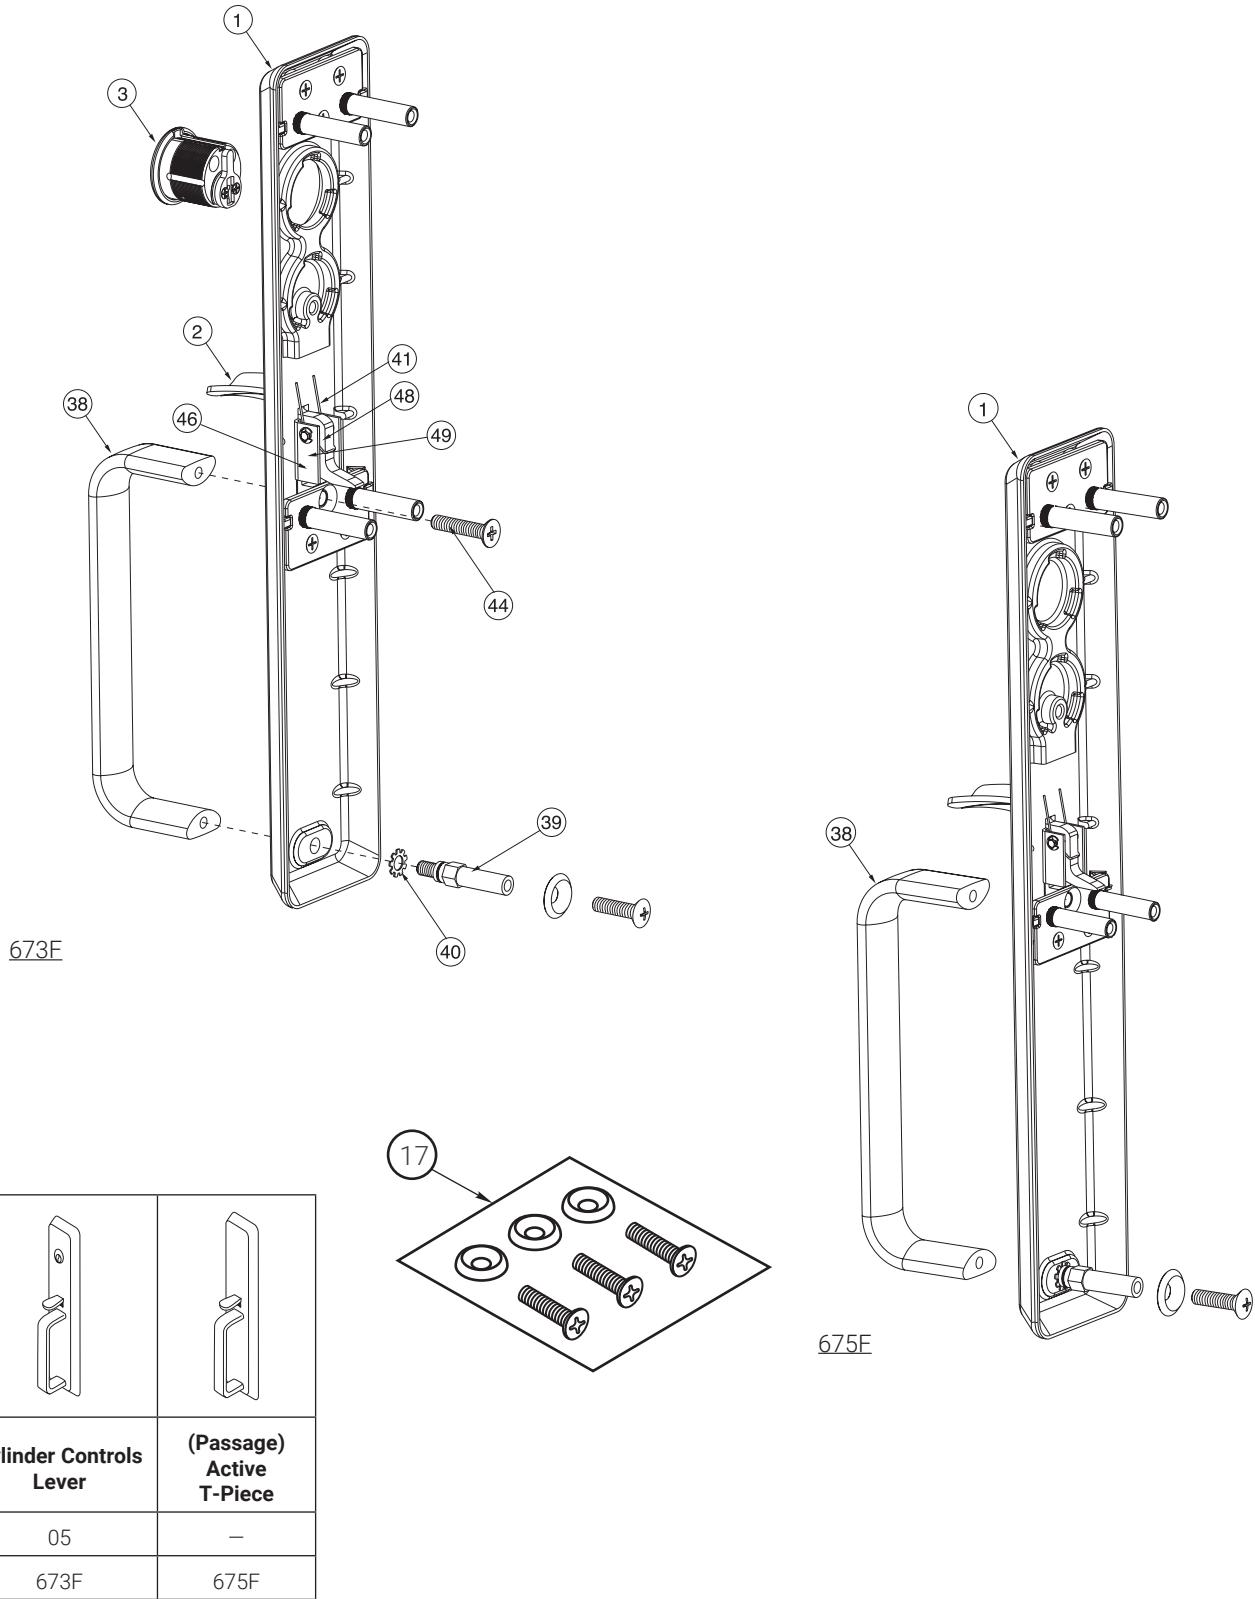


500F, 501F, 503F, 507F TRIM

Compatible with 6000 and 7000 Series Narrow Stile Exit Devices


Item	Part No.	Description
1	60-7200-0151-FIN 60-7200-0123-FIN 60-7200-0161-FIN 60-7200-0160-FIN	Escutcheon Assembly 500F 501F 503F 507F
2	60-7200-0156-FIN	Thumtturn / Spindle Assembly
3	See Chart Page 50	Cylinder, Rim
4	See Chart Page 50	Collar, Cylinder
5	60-7200-0159-000 60-7200-6145-082 60-2000-6206-082	Housing & Cam Assembly 503F 507F 501F, Housing, Cylinder
6	60-7000-1235-048	Screw, Cylinder Mounting (2)
7	81-0016-2200-999	Screw, NL Function
16	60-7000-9001-999	Thimble Insert, Nylon Not Shown
19	60-7000-1306-999	Spring Under Tailpiece for 503F, 507F Not Shown
25	60-7200-1120-059	Plate, Cover
28	60-7200-0360-000	Rack & Tailpiece Assembly
29	60-7200-1147-059	Lever, Clutch (503F)
30	60-7200-1083-059	Pin, Clutch Lever (503F)
31	99-9999-4617-999	Retainer, Clutch Lever Pin (2) (503F)
32	99-9999-3508-036	Nut, Cover Plate (2)
33	60-7200-1142-000	Hub Not Shown
34	99-9999-0246-999	Bushing, Nylon Not Shown
35	60-7200-1104-059	Washer, Grip Not Shown
36	81-0611-0410-036	Screw, 8-32 x 7/16 Spindle Not Shown
37	60-7200-1133-000	Spring, Rack (2)

500F, 501F, 503F, 507F TRIM

Compatible with 6000 and 7000 Series Narrow Stile Exit Devices

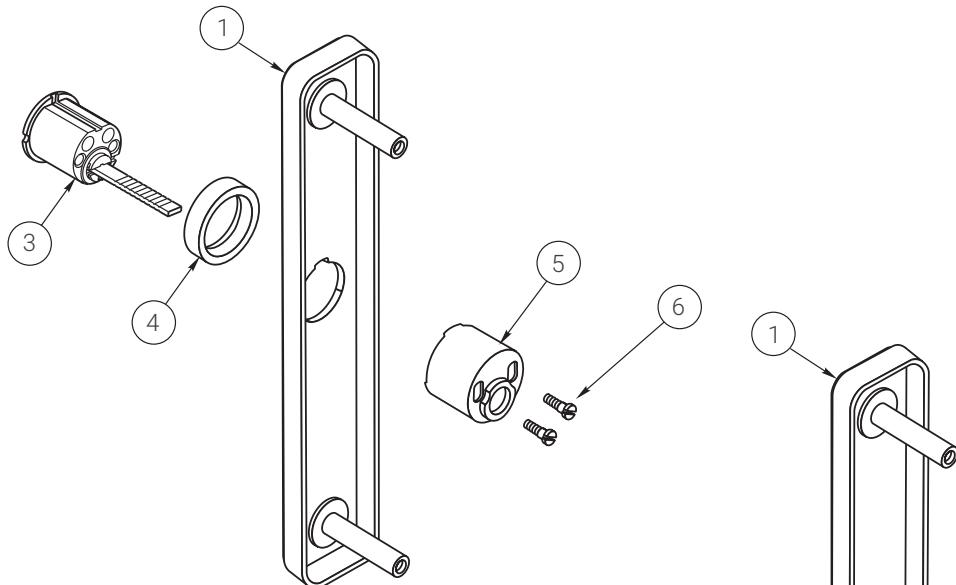

501F

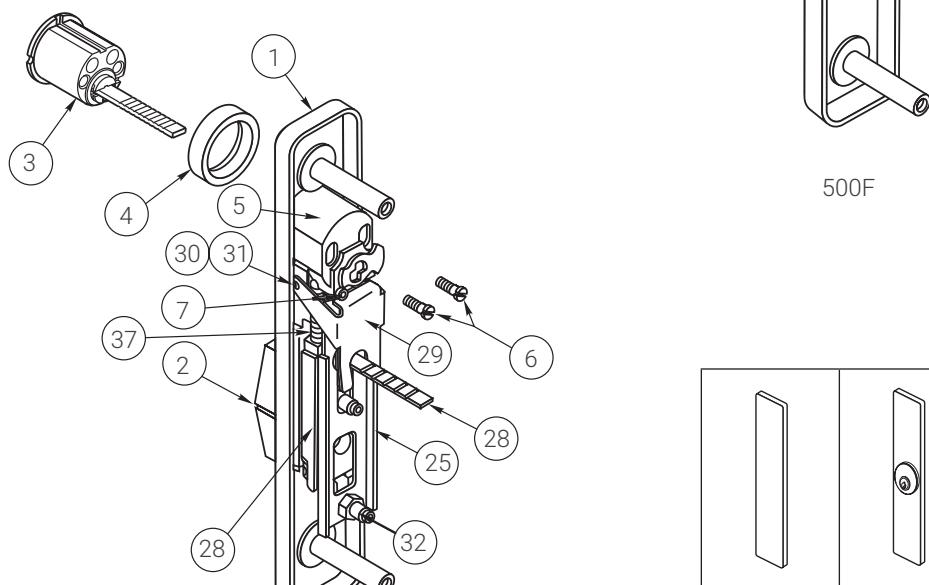

500F

503F
507F

(EO) Blank Plate	(NL) Access by Key	Cylinder Controls Thumturn	Passage Active Turn
—	03	11/12	—
500F	501F	503F	507F


506F, 508F, 509F TRIM

Compatible with 6000 and 7000 Series Narrow Stile Exit Devices

Item	Part No.	Description
1	60-7200-0161-FIN 60-7200-0160-FIN	Escutcheon Assembly 506F 508F, 509F
2	See Chart pages 48-49	Lever
3	See Chart Page 50	Rim Cylinder
4	See Chart Page 50	Cylinder Collar
5	60-7200-0159-000 60-7200-6145-082	Housing & Cam Assembly 506F-Housing,Cyl. 508F, 509F
6	60-7000-1235-048	Screw, Cylinder Mounting (2)
7	81-0016-2200-999	Screw, NL Function
16	60-7000-9001-999	Thimble Insert, Nylon Not Shown
19	60-7000-1306-999	Spring Under Tailpiece Not Shown
25	60-7200-1120-059	Plate, Cover
26	99-9999-5702-999	Spring, Extension
27	60-7200-1125-059	Nut, Spring Post
28	60-7200-0164-000	Rack & Tailpiece Assy.
29	60-7200-1147-059	Lever, Clutch
30	60-7200-1083-059	Pin, Clutch Lever
31	99-9999-4617-999	Retainer, Clutch Lever Pin (2)
32	99-9999-3508-036	Nut, Cover Plate (2) Not Shown
33	60-7200-1142-000	Hub Not Shown
34	99-9999-0246-999	Bushing, Nylon Not Shown
35	60-7200-1104-059	Washer, Grip Not Shown
36	81-0611-0410-036	Screw, 8-32 x 7/16, Spindle Not Shown
37	60-7200-1134-000	Spring, Rack (2)

506F, 508F, 509F TRIM

Compatible with 6000 and 7000 Series Narrow Stile Exit Devices

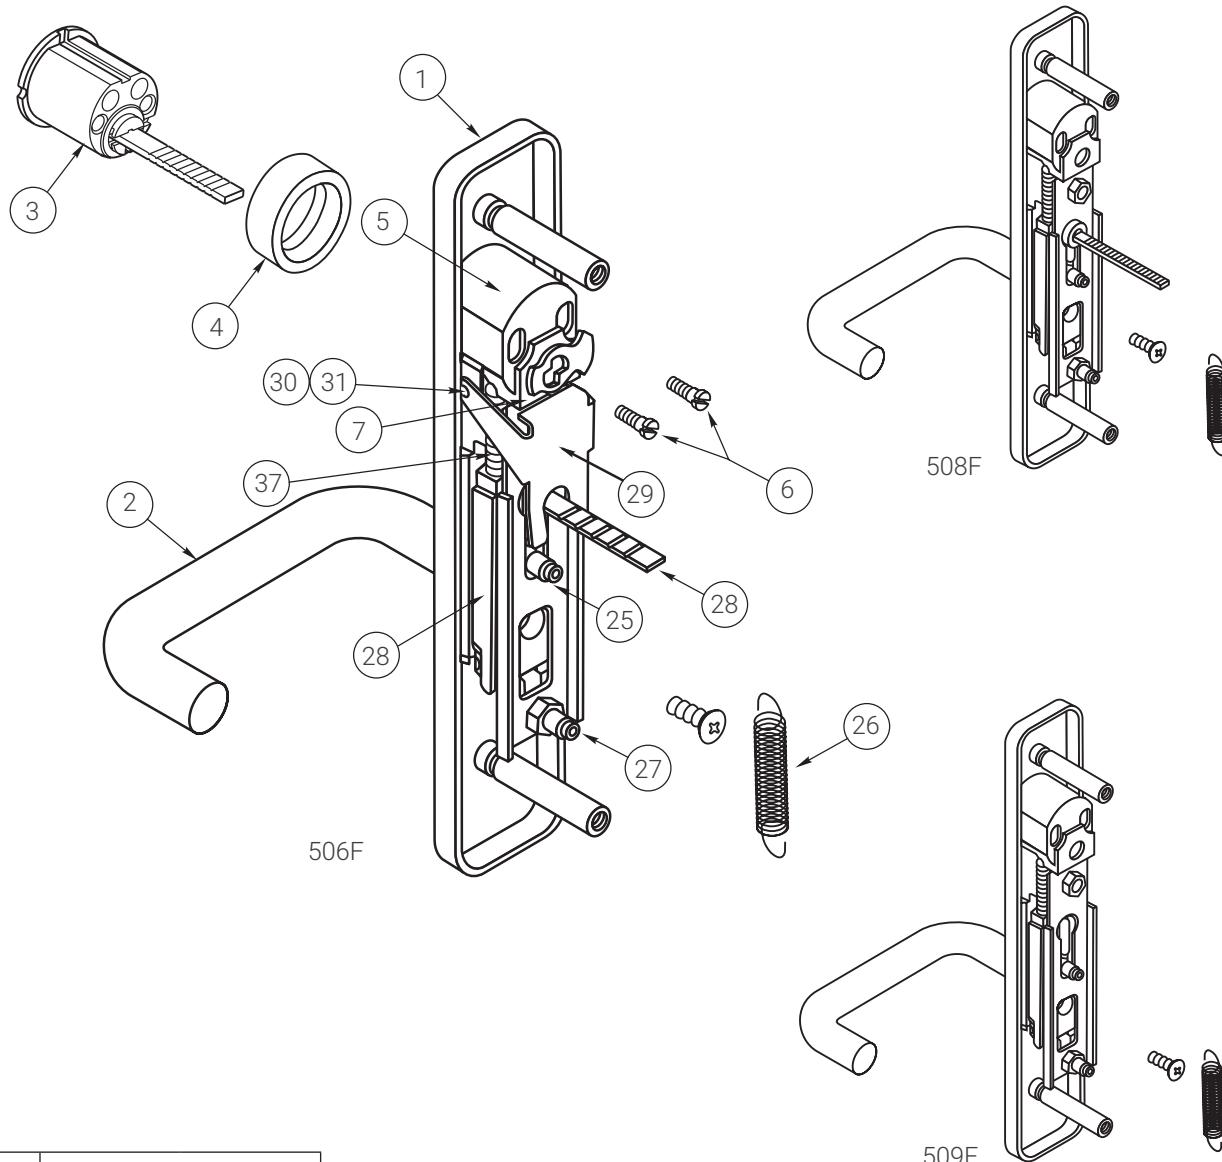

Cylinder Controls Lever	Passage Trim Lever	Rigid Dummy Lever
08	—	02
506F	508F	509F


512F, 514F TRIM

Compatible with 6000 and 7000 Series Narrow Stile Exit Devices

Item	Part No.	Description
1	60-7200-0165-FIN 60-7200-0172-FIN 60-7200-0120-FIN	Escutcheon Assembly 512F Top 514F Top Bottom
3	See Chart Page 50	Cylinder, Rim
4	See Chart Page 50	Collar, Cylinder
5	60-2000-6206-082	Housing, Cylinder
6	60-7000-1235-048	Screw, Cylinder Mounting (2)
17	81-9500-1476-FIN 81-0013-0670-FIN 99-9999-X156-FIN	Screw Packet, Mtg. Consists of the following: Screw, 1/4-20 x 1" OPHMS (1) Washer, #14 Finish (1)
38	60-7200-X136-FIN	Pull, Offset
39	60-7000-1039-048	Screw Post (2)
40	99-9999-7154-036	Lockwasher, Screw Post (2)

512F, 514F TRIM

Compatible with 6000 and 7000 Series Narrow Stile Exit Devices

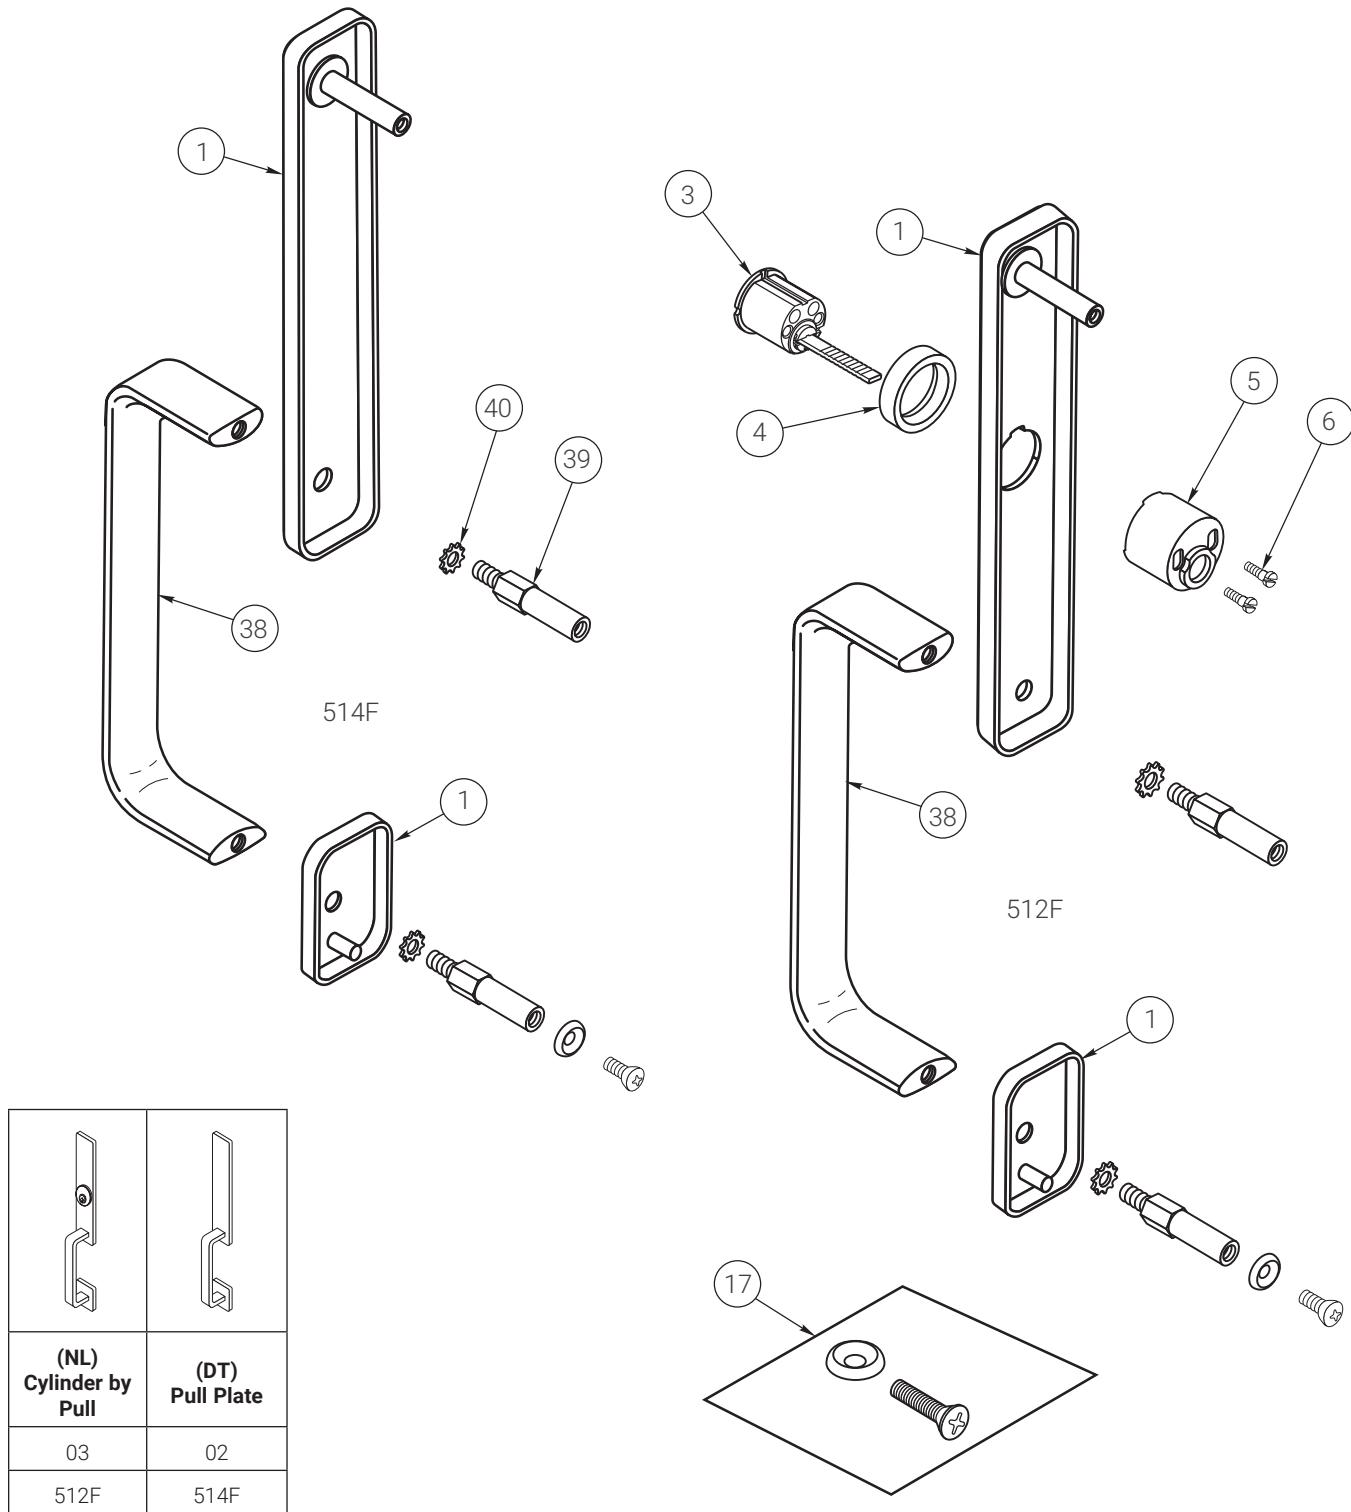


513F, 517F TRIM

Compatible with 6000 and 7000 Series Narrow Stile Exit Devices

Item	Part No.	Description
1	60-7200-0170-FIN 60-7200-0169-FIN 60-7200-0120-FIN	Escutcheon Assembly 513F Top 517F Top Bottom
2	60-7200-0156-FIN	Thumbturn/Spindle Assy.
3	See Chart Page 50	Cylinder, Rim
4	See Chart Page 50	Collar, Cylinder
5	60-7200-0159-000 60-7200-6145-082	Housing , Cylinder 513F 517F
6	60-7000-1235-048	Screw, Cylinder Mounting (2)
7	81-0016-2200-999	Screw, NL Function
16	60-7000-9001-999	Thimble Insert, Nylon Not Shown
17	81-9500-1476-FIN 81-0013-0670-FIN 99-9999-X156-FIN	Screw Packet, Mtg. Consists of the following: Screw, 1/4-20 x 1" OPHMS (1) Washer, #14 Finish (1)
19	60-7000-1306-999	Spring Under Tailpiece 513F Not Shown
25	60-7200-1120-059	Plate, Cover
28	60-7200-0164-000	Rack & Tailpiece Assy
29	60-7200-1147-059	Lever, Clutch (513F)
30	60-7200-1083-059	Pin, Clutch Lever (513F)
31	99-9999-4617-999	Retainer, Clutch Lever Pin (2) (513F)
32	99-9999-3508-036	Nut, Cover Plate (2)
33	60-7200-1142-000	Hub (Not Shown)
34	99-9999-0246-999	Bushing, Nylon Not Shown
35	60-7200-1104-059	Washer, Grip Not Shown
37	60-7200-1133-000	Spring, Rack (2) Not Shown
38	60-7200-X136-FIN	Pull, Offset
39	60-7000-1039-048	Screw Post (2)
40	99-9999-7154-036	Lockwasher, Screw Post (2)
50	99-9958-0044-999	Pin, 5/32 x 1-1/8, Groove Not Shown

513F, 517F TRIM

Compatible with 6000 and 7000 Series Narrow Stile Exit Devices

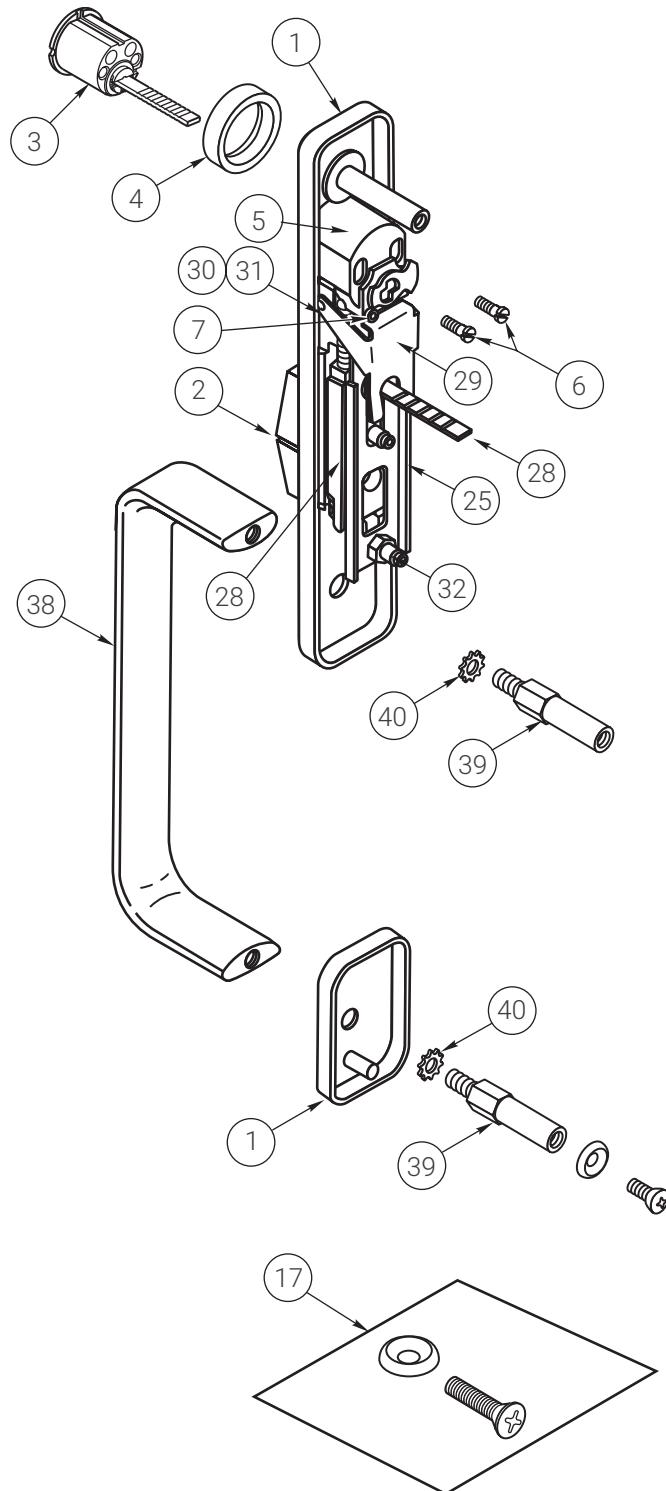

Cylinder Controls T-Turn	(Passage) Active T-Turn
11/12	—
513F	517F


518F, 519F TRIM

Compatible with 6000 and 7000 Series Narrow Stile Exit Devices

Item	Part No.	Description
1	60-7200-0162-FIN 60-7200-0163-FIN 60-7200-0120-FIN	Escutcheon Assembly 519F Top 518F Top Bottom
2	60-7000-X192-FIN	Thumbpiece
3	See Chart Page 50	Cylinder, Rim
4	See Chart Page 50	Collar, Cylinder
5	60-7200-0361-000	Housing, Cylinder
6	60-7000-1235-048	Screw, Cylinder Mounting (2)
7	81-0016-2200-999	Screw, NL Function
16	60-7000-9001-999	Thimble Insert, Nylon Not Shown
17	81-9500-1476-FIN 81-0013-0670-FIN 99-9999-X156-FIN	Screw Packet, Mtg. Consists of the following: Screw, 1/4-20 x 1" OPHMS (1) Washer, #14 Finish (1)
19	60-7000-1306-999	Spring Under Tailpiece 518F Not Shown
25	60-7200-1120-059	Plate, Cover
28	60-7200-0360-000	Rack & Tailpiece Assy
29	60-7200-1147-059	Lever, Clutch (518F)
30	60-7200-1083-059	Pin, Clutch Lever (518F)
31	99-9999-4617-999	Retainer, Clutch Lever Pin (2) (518F)
32	99-9999-3508-036	Nut, Cover Plate (2)
33	60-7200-1142-000	Hub Not Shown
35	60-7200-1104-059	Washer, Grip Not Shown
37	60-7200-1133-000	Spring, Rack (2) Not Shown
38	60-7200-X136-FIN	Pull, Offset
39	60-7000-1039-048	Screw Post (2)
40	99-9999-7154-036	Lockwasher, Screw
50	99-9958-0044-999	Pin, 5/32 x 1-1/8, Groove Not Shown

518F, 519F TRIM

Compatible with 6000 and 7000 Series Narrow Stile Exit Devices

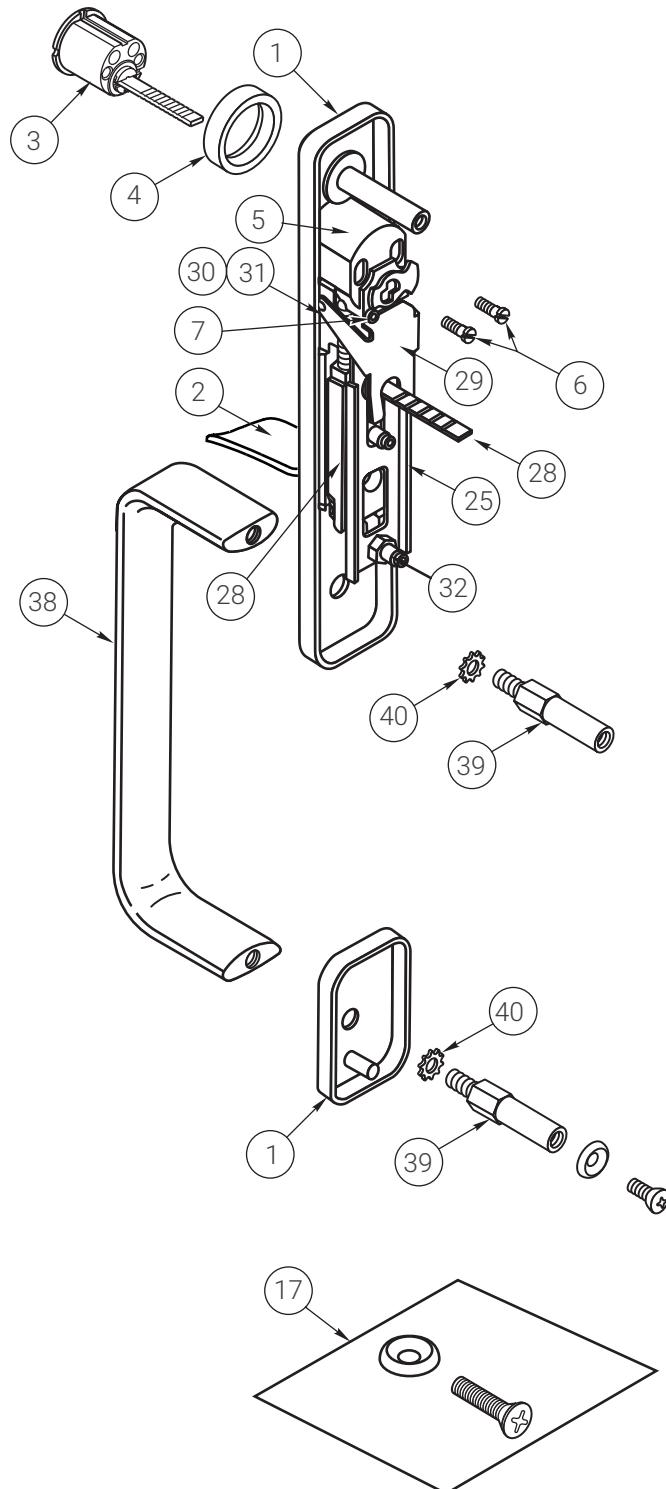


Cylinder Controls T-Piece	Passage Active T-Piece
05/06	—
518F	519F

480F, 481F, 482F, 483F TRIM

Compatible with 1800, 2100, 6000 and 7000 Series Wide & Narrow Stile Exit Devices

481F

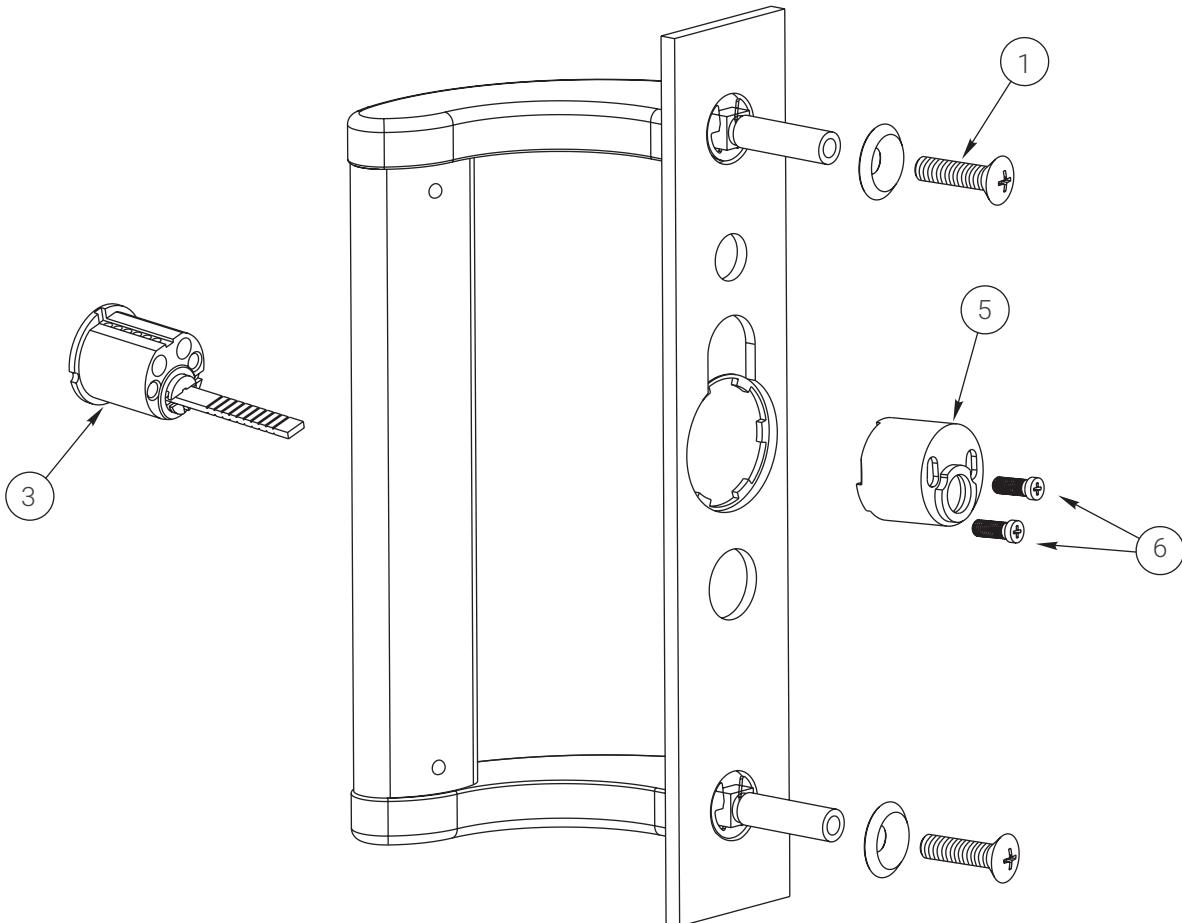


Dummy Pull	Nightlatch	Dummy Pull (Special lengths)	Nightlatch (Special lengths)
02	03	02	03
480F	481F	482F	483F

Item	Part No.	Description
1	81-9500-1404-FIN 81-0013-0670-FIN 99-9999-X156-FIN	Screw Packet, Mtg. Consists of the following: Screw 1/4-20 x 1" OPHMS(2) Washer #14 Finish (2)
3	See Chart Page 50	Cylinder, Rim
5	60-2000-6206-082	Housing, Cylinder (481F)
6	60-7000-1235-048	Screw, Cylinder Mtg. (2)

Note: Handle and Escutcheon sold as assembly only.

680F, 681F, 684F TRIM

Compatible with 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices

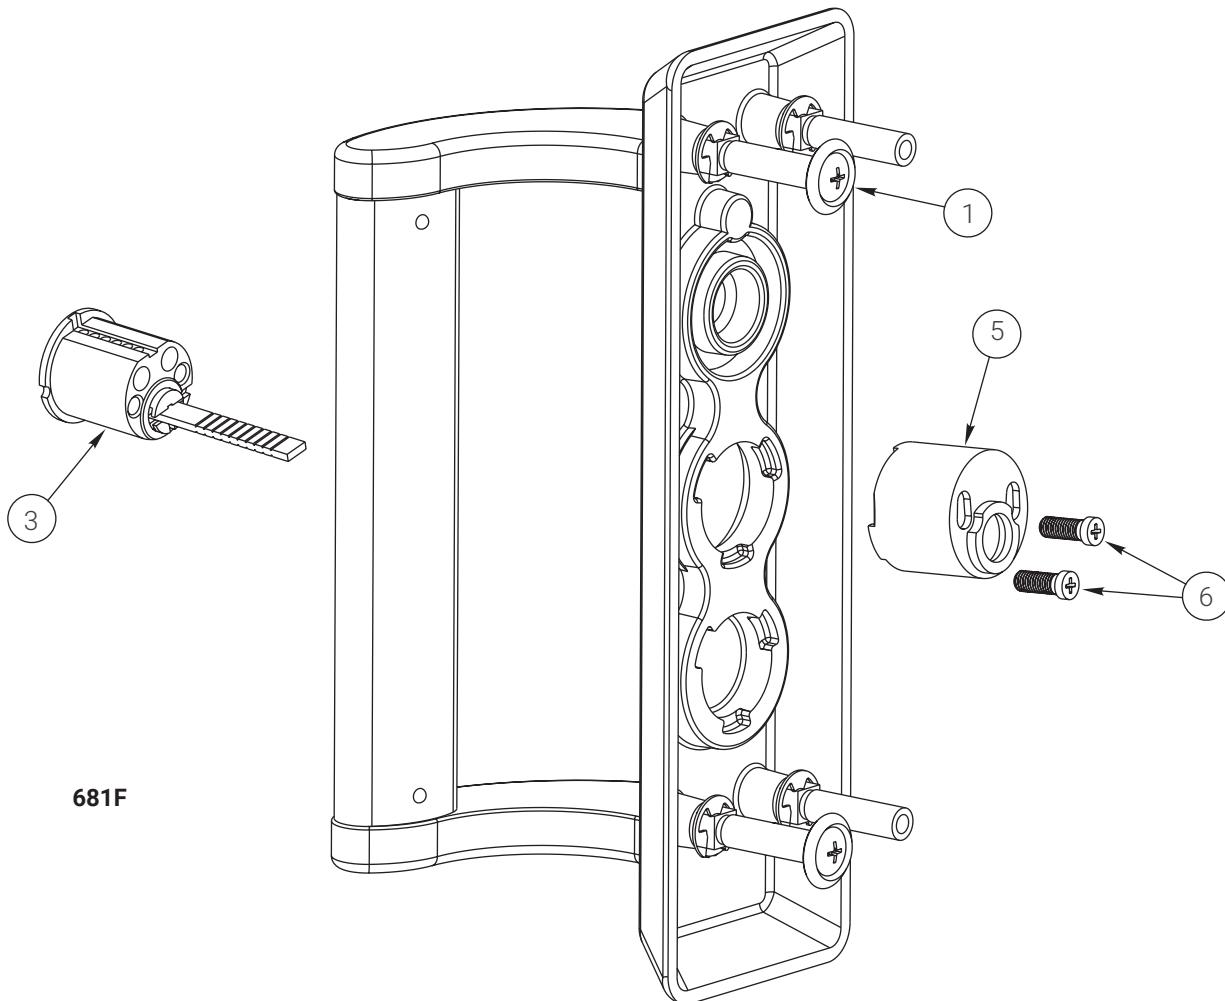

Dummy Pull	Nightlatch	Mortise Nightlatch
02	03	03
680F	681F	684F

Item	Part No.	Description
1	81-9500-1404-FIN 81-0013-0670-FIN 99-9999-X156-FIN	Screw Packet, Mtg. Consists of the following: Screw 1/4-20 x 1" OPHMS(2) Washer #14 Finish (2)
3	See Chart Page 50	Cylinder, Rim or Mortise
5	60-2000-6206-082	Housing, Cylinder (681F)
6	60-7000-1235-048	Screw, Cylinder Mtg. (2)

Note: Handle and Escutcheon sold as assembly only.

441F, 446F, 448F, 449F TRIM


Compatible with 1800, 2100, 6000 and 7000 Series Wide & Narrow Stile Exit Devices

Item	Part No.	Description
1	14-5300-0030-010	Rose Plate
2	14-5300-2024-FIN	Rose Scalp
3		Lever Plain AU - Augusta MO - Monroe PB - Pacific Beach Cylinder 14-5301-6040-FIN 14-5301-6902-FIN 14-5301-6054-FIN AU - Augusta MO - Monroe PB - Pacific Beach LFIC 6 Pin 1-3/4" Door 14-5300-6039-FIN 14-5305-6056-FIN 14-5305-6054-FIN AU - Augusta MO - Monroe PB - Pacific Beach LFIC 6 Pin 2-1/4" Door 14-5305-0006-FIN 14-5305-0014-FIN 14-5305-0010-FIN AU - Augusta MO - Monroe PB - Pacific Beach SFIC 6 & 7 Pin 1-3/4" Door 14-5305-0018-FIN 14-5305-0026-FIN 14-5305-0022-FIN AU - Augusta MO - Monroe PB - Pacific Beach SFIC 6 & 7 Pin 2-1/4" Door 14-5305-0008-FIN 14-5305-0016-FIN 14-5305-0012-FIN AU - Augusta MO - Monroe PB - Pacific Beach SFIC 6 & 7 Pin 1-3/4" Door 14-5305-6030-FIN 14-5305-0028-FIN 14-5305-0024-FIN AU - Augusta MO - Monroe PB - Pacific Beach Schlage® LFIC 6 Pin 1-3/4" Door 14-5305-0009-FIN 14-5305-0013-FIN AU - Augusta PB - Pacific Beach Schlage® LFIC 6 Pin 2-1/4" Door 14-5305-0021-FIN 14-5305-0025-FIN AU - Augusta PB - Pacific Beach ASSA/Medeco LFIC 6 Pin 1-3/4" Door 14-5305-6028-FIN AU - Augusta
4	14-5303-0001-048 14-0355-0003-048	Rose Support Assy 441F, 446F, 448F 449F
5	14-5305-9078-999	Spacer
6	60-7000-0170-048 60-7000-0169-048 60-7000-0168-048	Spindle Assy 441F 446F 448F
7	81-3711-0412-048	8-32 X 1/2" FHPMS (2)
8	81-9500-1520-048	Screw Pack
9	See Chart Page 50	Cylinder

441F, 446F, 448F, 449F TRIM

Compatible with 1800, 2100, 6000 and 7000 Series Wide & Narrow Stile Exit Devices

	 AU	 MO	 PB		
	(NL) Access by Key	Cylinder Control Lever	(DT) Free Wheeling Lever	Passage Lever	(DT) Rigid Lever
ANSI #	03	08	02	14	02
Trim	441F	446F	448F	448F	449F

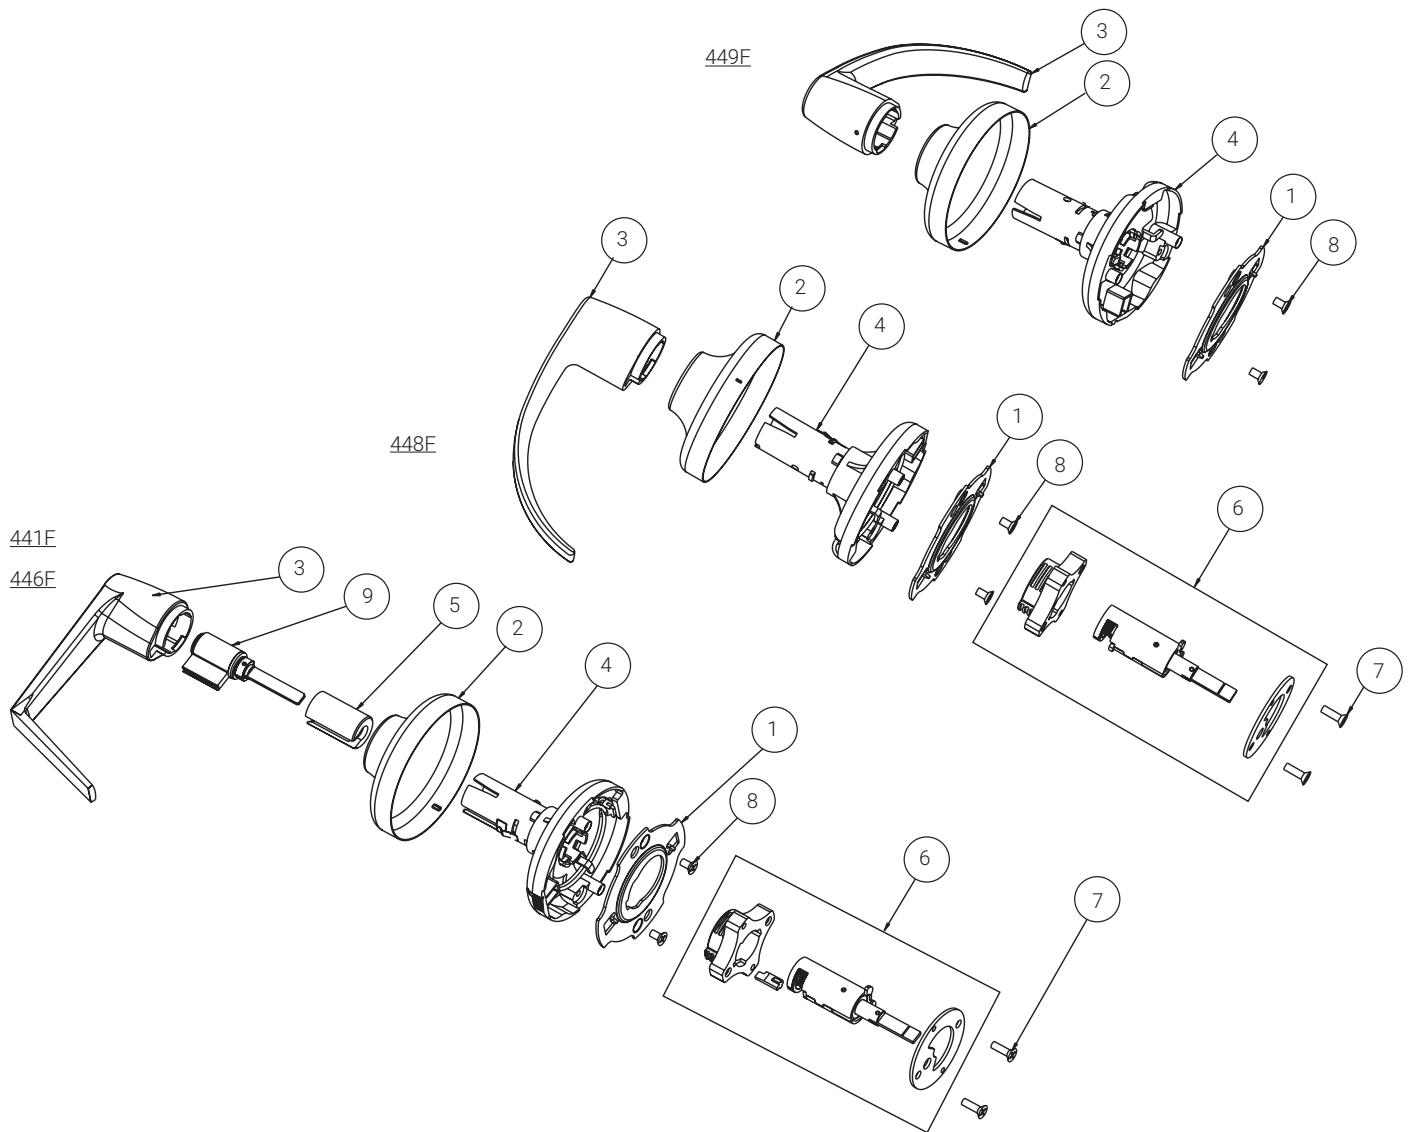


541F, 546F, 548F, 549F TRIM

Compatible with 1800, 2100, 6000 and 7000 Series Wide & Narrow Stile Exit Devices


Item	Part No.	Description
1	14-5400-1051-048	Rose Plate
2	14-5401-2711-FIN	Rose Scalp
3	14-5401-6063-FIN 14-5401-6064-FIN 14-5401-6062-FIN 14-5407-6038-FIN 14-5407-6042-FIN 14-5407-6062-FIN 14-5417-6021-FIN 14-5417-6030-FIN 14-5417-6040-FIN 14-5417-6022-FIN 14-5417-6031-FIN 14-5417-6041-FIN 14-5417-6029-FIN 14-5417-6032-FIN 14-5417-6042-FIN 14-5417-6059-FIN 14-5417-6061-FIN 14-5417-6060-FIN 14-5417-6023-FIN	Lever Plain AU - Augusta MO - Monroe PB - Pacific Beach Cylinder AU - Augusta MO - Monroe PB - Pacific Beach LFIC 6 Pin AU - Augusta MO - Monroe PB - Pacific Beach LFIC 7 Pin AU - Augusta MO - Monroe PB - Pacific Beach SFIC 6 & 7 Pin AU - Augusta MO - Monroe PB - Pacific Beach Schlage® LFIC 6 Pin AU - Augusta MO - Monroe PB - Pacific Beach ASSA/Medeco LFIC AU - Augusta
4	60-7000-4005-999 60-7000-4015-999	Rose Support Assy 541F, 546F, 548F 549F
6	60-7000-0170-048 60-7000-0169-048 60-7000-0168-048	Spindle Assy 541F 546F 548F
7	81-3812-0408-059	8-32 X 3/8" PFHUCMS (2)
8	81-9500-1520-048	Screw Pack
9	See Chart Page 50	Cylinder
10	14-5407-9034-999	Lever Insert
Not Shown	14-5401-9580-999	Spring Pad Spacer 548F, 549F
	14-5407-1102-000	Lever Removal Tool

541F, 546F, 548F, 549F TRIM

Compatible with 1800, 2100, 6000 and 7000 Series Wide & Narrow Stile Exit Devices

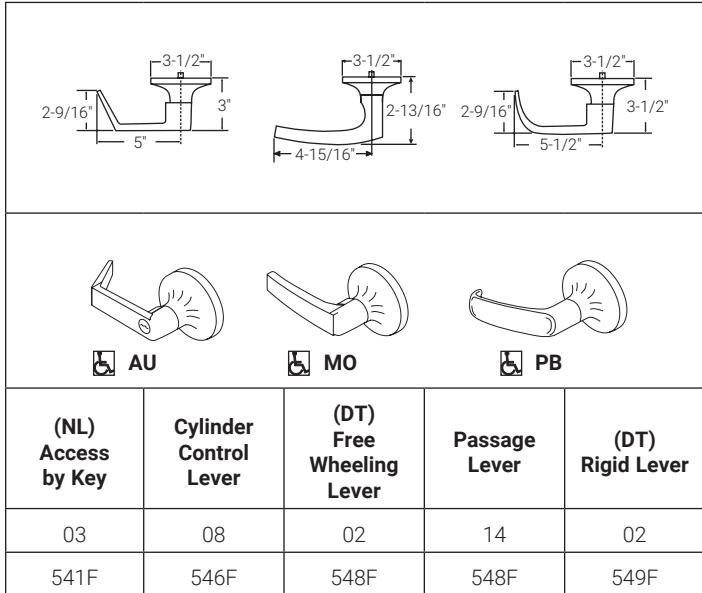

Note: Available as assemblies only.

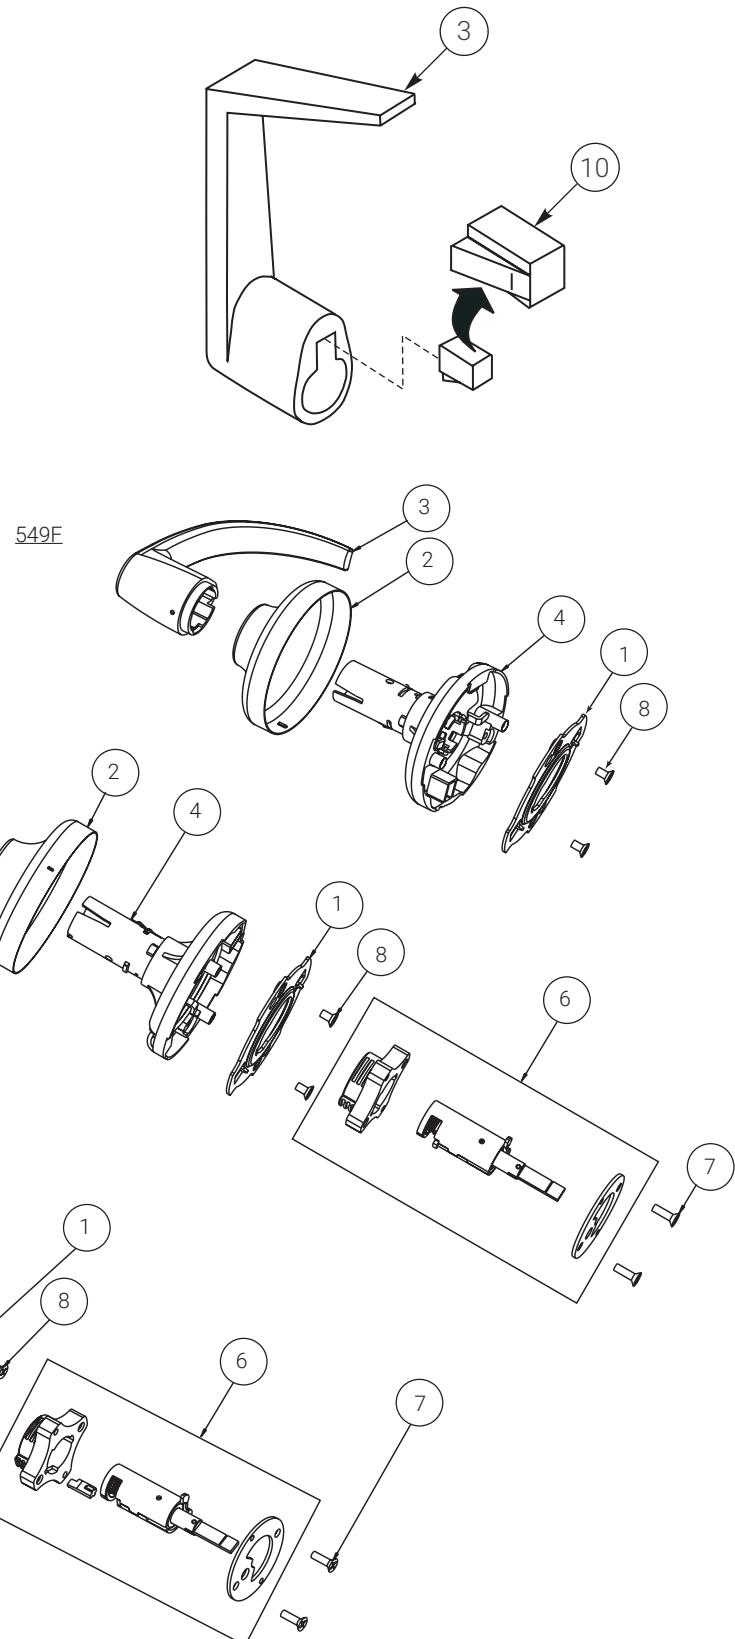


581F, 586F, 588F, 589F TRIM

Compatible with 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices


Item	Part No.	Description
2	14-5401-2711-FIN	Rose Scalp
3	14-5401-6063-FIN 14-5401-6064-FIN 14-5401-6062-FIN 14-5407-6038-FIN 14-5407-6042-FIN 14-5407-6062-FIN 14-5417-6021-FIN 14-5417-6030-FIN 14-5417-6040-FIN 14-5417-6022-FIN 14-5417-6031-FIN 14-5417-6041-FIN 14-5417-6029-FIN 14-5417-6032-FIN 14-5417-6042-FIN 14-5417-6059-FIN 14-5417-6061-FIN 14-5417-6060-FIN 14-5417-6023-FIN	Lever Plain AU - Augusta MO - Monroe PB - Pacific Beach Cylinder AU - Augusta MO - Monroe PB - Pacific Beach LFIC 6 Pin AU - Augusta MO - Monroe PB - Pacific Beach LFIC 7 Pin AU - Augusta MO - Monroe PB - Pacific Beach SFIC 6 & 7 Pin AU - Augusta MO - Monroe PB - Pacific Beach Schlage® LFIC 6 Pin AU - Augusta MO - Monroe PB - Pacific Beach ASSA/Medeco LFIC AU - Augusta
7	14-5407-1102-000	Tool, Lever Removal
11	60-7000-0155-FIN	Escutcheon Plate Assy
Not Shown	14-5400-1051-048	Rose Plate
	14-5407-9034-999	Lever Insert
	81-3711-0412-048	8-32 X 1/2" FHPMS (2)
	81-9500-1520-048	Screw Pack
	60-7000-4005-999 60-7000-4015-999	Rose Support Assy 581F, 586F, 588F 589F
	60-7000-0170-048 60-7000-0169-048 60-7000-0168-048	Spindle Assy 581F 586F 588F
	14-5401-9580-999	Spring Pad Spacer 588F, 549F

581F, 586F, 588F, 589F TRIM

Compatible with 1800, 2100, 6000 and 7000 Series Wide Stile Exit Devices

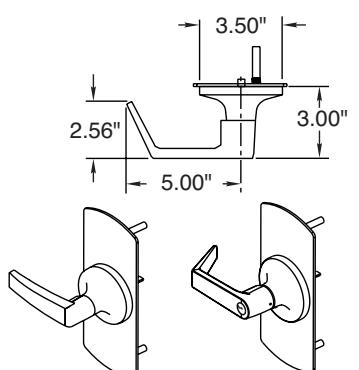


Dummy Rigid Lever	Dummy Free Wheeling Lever	Passage Lever	Cylinder Control Lever	Nightlatch Access by Key
F02	F02	F14	F08	F03
589F	588F	588F	586F	581F

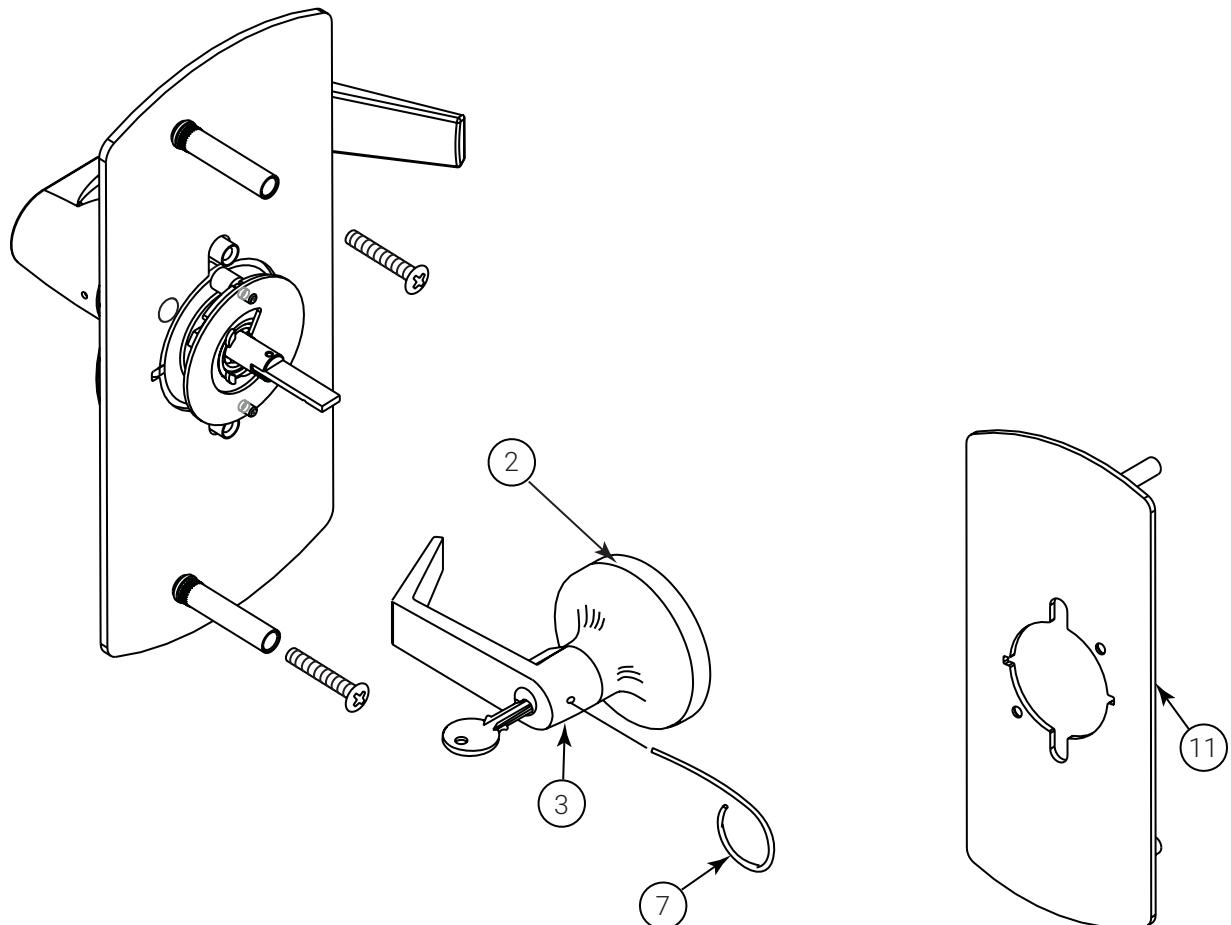

LEVERS

Used with 420F, 500F and 620F Series Trim



AR 	AU 	CR 
Arcadia Projection: 3-1/4" (82mm) Lever assembly: RHR 60-7000-0097-FIN LHR 60-7000-0098-FIN	Augusta Projection: 2-5/8" (61mm) Lever assembly: 60-7000-0095-FIN	Carmel Projection: 3-1/8" (79mm) Lever assembly: 60-7000-0140-FIN
JN 	MO 	PB 
Jefferson Projection: 2-9/16" (65mm) Lever assembly: 60-7000-0093-FIN	Monroe Projection: 3" (76mm) Lever assembly: 60-7000-0239-FIN	Pacific Beach Projection: 3-5/16" (84mm) Lever assembly: 60-7000-0240-FIN
PN 	VI 	HA 
Pinehurst Projection: 3-1/16" (78mm) Lever assembly: 60-7000-0198-FIN	Virginia Projection: 3-1/8" (79mm) Lever assembly: 60-7000-0236-FIN	Hampton Projection: 3-3/8" (86mm) Lever assembly: 60-7000-0285-FIN
603F 		
Thumbturn Assembly: 60-7000-0157-FIN		

Lever Handle Assemblies Include:

Spindle - P/N 60-7000-1243-059

Roll Pin - P/N 99-9999-3979-023

Note: Projection dimensions are provided using the 620F series escutcheon plates

REFLECTIONS® LEVERS

Used with 420F, 500F and 620F Series Trim



Hudson  TB Projection: 3-1/16" (78mm) Lever assembly:					 UB Projection: 3-1/4" (83mm) Lever assembly:					 TC Projection: 3" (76mm) Lever assembly:					 TD Projection: 3-7/16" (87mm) Lever assembly:					 UC Projection: 3-7/16" (87mm) Lever assembly:					Part numbers coming soon. Contact Technical Product Support for part number information.									
Spree  RS Projection: 3-1/8" (79mm) Lever assembly:					 RT Projection: 3-1/8" (79mm) Lever assembly:					 RU Projection: 3-13/32" (87mm) Lever assembly:					 RV Projection: 3" (76mm) Lever assembly:																			
Seine  TE Projection: 3" (76mm) Lever assembly:					 TG Projection: 2-13/16" (61mm) Lever assembly:					 TI Projection: 3-3/8" (85mm) Lever assembly:					 TJ Projection: 3-1/16" (78mm) Lever assembly:					 TK Projection: 3-1/4" (83mm) Lever assembly:					 GT Projection: 3-1/4" (83mm) Lever assembly:									
Thames  TM Projection: 3-1/16" (78mm) Lever assembly:					 TN Projection: 3-1/16" (78mm) Lever assembly:					 TP Projection: 3-5/16" (84mm) Lever assembly:					 TR Projection: 3-1/16" (78mm) Lever assembly:					 TS Projection: 3-1/8" (80mm) Lever assembly:					 TQ Projection: 3-1/16" (78mm) Lever assembly:									
Victoria  TT Projection: 2-11/16" (68mm) Lever assembly:					 TU Projection: 3-1/4" (83mm) Lever assembly:					 TW Projection: 3" (76mm) Lever assembly:					 TX Projection: 3-5/8" (92mm) Lever assembly:					 UX Projection: 3-7/16" (87mm) Lever assembly:					 TY Projection: 3-5/16" (84mm) Lever assembly:					 WG Projection: 3-5/8" (92mm) Lever assembly:				
Niagara  MA Projection: 2-13/16" (71mm) Lever assembly:					 RA Projection: 3-11/16" (94mm) Lever assembly:					 RB Projection: 2-13/16" (71mm) Lever assembly:					 RC Projection: 2-13/16" (71mm) Lever assembly:																			

Note: Projection dimensions are provided using the 620F Series escutcheon plates.

CYLINDERS


		Cylinder(s)	Description	Cylinder Collar	Mounting Screws	
Rim Cylinder	Narrow Escutcheon Trim 500F/510F Series Rim cylinders with special #599 cylinder rings. NOT AVAILABLE with U5109 cylinder.		1109 / 5109 6-pin	Standard / Security	599-419	60-7000-1235-048
			1109 / 5109 7-pin	Standard / Security	599-419	60-7000-1235-048
			1193 / 5193 6-pin	LFIC / Sec. LFIC	599-544	10-1193-1018-048
			1193 / 5193 7-pin	LFIC / Sec. LFIC	599-544	10-1193-1018-048
			1709 6-pin	CMK Cylinder	599-544	34-2311-8738-048
			1709 7-pin	CMK Cylinder	599-700	34-2311-8738-048
Rim Cylinder	Escutcheon Trim 620F/630F and 600 Series Electric Trim Rim Cylinders		1109 / 5109 6-pin	Standard / Security	----	60-7000-1235-048
			U5109 6-pin	High Security	----	60-7000-1235-048
			1109 / 5109 7-pin	Standard / Security	----	60-7000-1235-048
			U5109 7-pin	High Security	----	60-7000-1235-048
			1709 6-pin	CMK Cylinder	1765-.250	34-2311-8738-048
			1709 7-pin	CMK Cylinder	1765-.250	34-2311-8738-048
			1193 / 5193 6-pin	Std. / Sec. LFIC	1765-.250	10-1193-1018-048
			1193 / 5193 7-pin	Std. / Sec. LFIC	1765-.344	10-1193-1018-048

Note: Mounting screw part numbers shown are the screws to mount the cylinder.

		Cylinder(s)	Description	Cylinder Collar
Mortise Cylinder	Mortise Exit Devices Escutcheon Trim 650F/660F Series	2153 / 5153, 6 or 7-pin, 1-1/2" (38mm)	Standard / Security	----
		2196 / 5196 6-pin	Std. LFIC / Sec. LFIC	----
		2197 / 5197 7-pin	Std. LFIC / Sec. LFIC	1765-.062
Mortise Cylinder	Keyed Removable Mullions KRM200/200F	2153/5153*, 6 or 7-pin, 1-1/8" (29mm)	Standard / Security	----
		2196 / 5196 6-pin	Std. LFIC / Sec. LFIC	1765-.250
		2197 / 5197 7-pin	Std. LFIC / Sec. LFIC	1765-.250
Mortise Cylinder	Cylinder Dogging	2153 , 6-pin, 1-1/8" (29mm)	Standard	----
		2153, 7-pin 1-1/4" (32mm)	Optional 7-pin	1765-.156
		2196, 6-pin 1-1/2" (38mm)	Std. LFIC 6-pin	1765-.406
Alarm Kit		2197, 7-pin 1-11/16" (42mm)	Std. LFIC 7-pin	1765-.594

As with exit device trim you must order a cylinder to go with a keyed removable mullion. Keyed removable mullions accept a standard 6-pin 2153 mortise cylinder with cam #2160. Other cylinders are optional.

*U5153 6 and 7-pin cylinders cannot be used with a keyed removable mullion.


		Cylinder(s)	Description
Lever Trim 540F or 440F Series		1802	6-pin Lever Cyl. (Std.)
		1802A	7-pin Lever Cylinder
		1210	6-pin LFIC Lever Cylinder
		1220	7-pin LFIC Lever Cylinder
		5802	6-pin Security Lever Cyl.
		5802A	7-pin Security Lever Cyl.
		5210	6-pin LFIC Security Cyl.
		5220	7-pin LFIC Security Cyl.
		107S	Adaptor kit for Schlage® Cyl.
		"B" Trim Prefix	Lever to accept 6- or 7-pin SFIC cores

*AU & PB levers only.

MULLIONS


Item	Part No.	Description
1	60-7200-0011-FIN 60-7200-0013-FIN	Mullion 8' M300 Mullion 10' M300
7	81-9500-1417-FIN	Stabilizer Kit (optional) contains: Bracket, Stabilizer (2) Stabilizer (2) Spacer, Stabilizer (4) Screw, #10-24 x 3/4" FHM-PH (4) Screw, #10-24 x 1" FHM-PH (4)
8	81-9500-1416-FIN	Mounting Bracket Packet contains: Mullion Mounting Plate (2) Screw, 1/4-20 x 1/2 FHUM-PH (6) Anchor, 1/4-20 Masonry (3)
9	81-9500-1414-FIN	Carriage Bolt Packet contains: Bolt, 1/4-20 x 1-3/4" Carriage
Not Shown	81-9500-1418-FIN	Parts Packet contains: Items 7, 8 and 9

M300

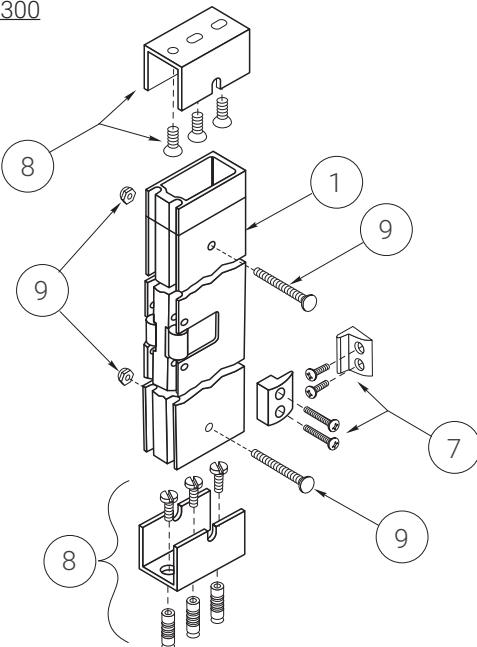

MULLIONS

Item	Part No.	Description
2	60-7000-0759 60-7000-0755	Top Retainer Packs: M200(F) KRM200(F)
3	60-7000-0763 60-7000-0760	Bottom Retainer Packs: M200(F) KRM200(F)
4	60-7000-0750	Locking Mechanism, KRM200(F)
5	See Chart Page 50	Cylinder, Mortise

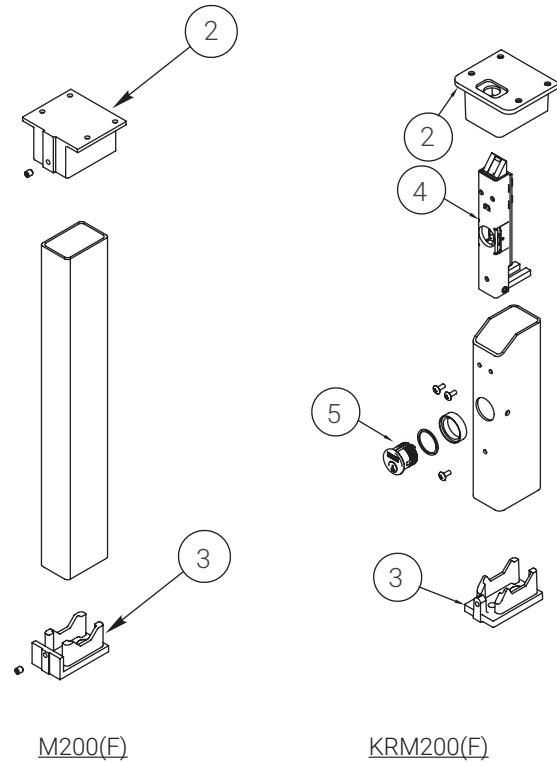

M200(F)

KRM200(F)

HANDING INSTRUCTIONS

The following Free-Wheeling exit device lever trims will ship with a universal lever spring and hub:

626F, 627F, 628F, 629F, 690F, 691F

The universal spring allows the handing for the trim to easily be changed without the need for any additional parts.

The required trim handing should be specified on the purchase order and will be set at the factory.

The following details changing the handing in the field:

Tools Needed: Needle Nose pliers, Crescent wrench


Notes:

During change ensure black gear does not rotate.


Please wear safety glasses and be aware of spring tension on spring hub upon removal and assembly.

Light lubrication is recommended under flat gear, white lithium grease can be used.


- Remove cotter pin
- Remove castle nut
- Remove washer
- Carefully pull up on spring hub to disengage spring
- Remove spring and note orientation
- Remove lever handle
- Pick-up flat gear, flip and orient stop on opposite side of stop post. See pictures for hand orientation.
- Install spring upside down from original orientation and place spring leg on opposite side of stop post from original installation orientation
- Install lever 180 degrees from original position
- Install spring hub with stamped number in the 6 o'clock position
- Rotate spring leg around with needle nose pliers to engage notch in spring hub, refer to pictures for reference position. Press down on spring hub to ensure complete engagement.
- Install washer
- Install castle nut, do not over tighten, verify by insuring lever returns horizontally on its own
- Install cotter pin

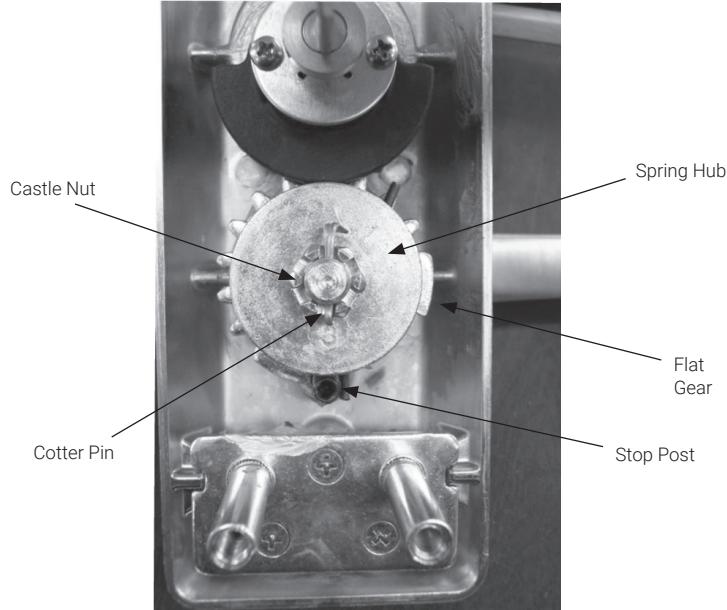

Left Hand Reverse Shown

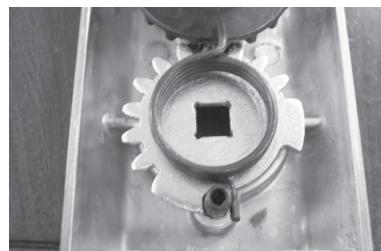

Left Hand Reverse gear & spring orientation

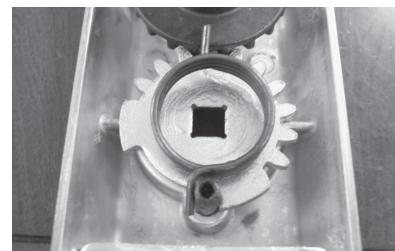

Right Hand Reverse gear & spring orientation



The ASSA ABLOY Group is the global leader in access solutions.
Every day, we help billions of people experience a more open world.

ASSA ABLOY Opening Solutions leads the development within door openings and products for access solutions in homes, businesses and institutions. Our offering includes doors, frames, door and window hardware, mechanical and smart locks, access control and service.

ACCENTRA

ASSA ABLOY

TECHNICAL SUPPORT

(troubleshooting, product use and application, returns)
Tel: 855-557-5078
Email: techsupport.accentra@assaabloy.com

CUSTOMER SUPPORT

(orders, product configuration, pricing, lead-time)
Tel: 855-557-5078 x2
Email: Customerservice.Accentra@assaabloy.com

 **WARNING**

This product can expose you to lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov.

U.S.A.:

ASSA ABLOY ACCENTRA™
225 Episcopal Road
Berlin, CT 06037-4004
Tel: 1-800-438-1951
Fax: 1-800-338-0965
www.accentra-assaabloy.com

Canada:

ASSA ABLOY Door Security Solutions Canada
160 Four Valley Drive
Vaughan, Ontario L4K 4T9
Tel: 1-800-461-3007
Fax: 1-800-461-8989
assaabloydss.ca

International:

ASSA ABLOY Americas International
Tel: 1-905-821-7775
Fax: 1-905-821-1429
assaabloyai.com